

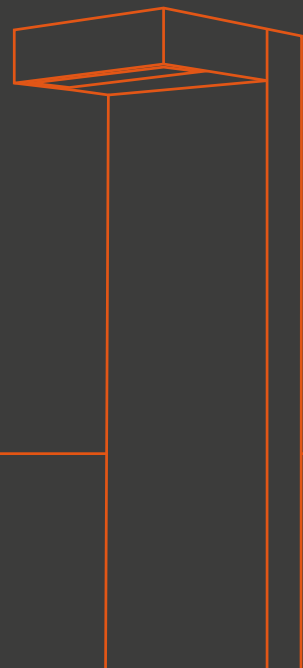




Name: **News**

Year: **2024**

Company: **Civic s.r.l.**

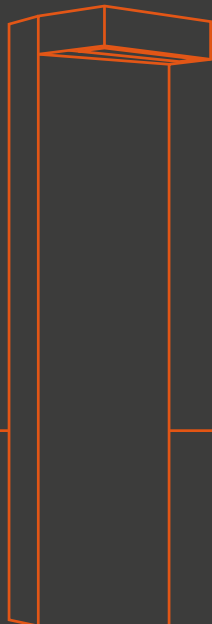

PRODUTTORI

MANUFACTUR

VENDITORI SEL

CONSULENTI C

WE ARE CIVIC

MULTILANGUA

PROFESSIONIS

PROFESSIONA

ERS ARTIGIANI

LLERS

CONSULTANTS

MULTILINGUA


AGE

TI

LS



STILO

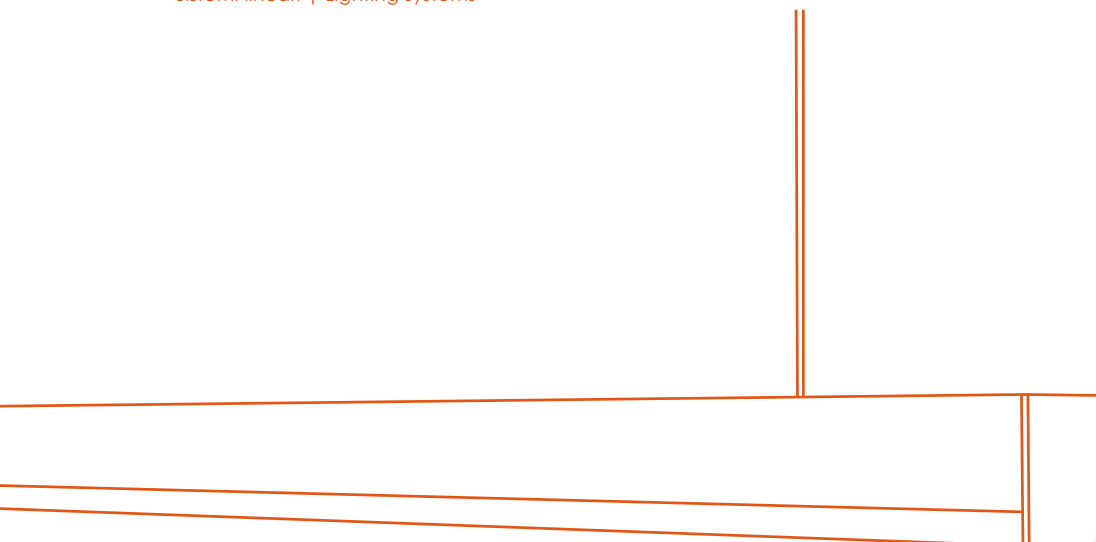

STILO

Apparecchio per installazione singola a soffitto o a sospensione per interni. Corpo in alluminio estruso verniciato a polvere. Diffusore in policarbonato opalino. Testate in acciaio verniciato a polvere incluse nell'apparecchio. Dotato di LED in colore bianco 5500K/4000K/3000K. Driver incluso. IK08. CRI 90. Durata: 50000h, L80 B10. Tolleranza minima del colore: 3MacAdam (3SDCM).

Ceiling or suspended single fitting for indoor use. Structure made of powder coated extruded aluminium. Opal polycarbonate diffuser. Powder coated steel end caps included. Equipped with LEDs in 5500K/4000K/3000K white colour. Driver included. IK08. CRI 90. Lifetime: 50000h, L80 B10. Minimum colour tolerance: 3MacAdam (3SDCM).

CE	IP20
LED	RG0
CRI 90	Mac Adam 3
L80 B10	
50000H	Driver on/off incl.



STILO

Z.
COLOR

Bianco ragg./Rough white - **32**
Grigio chiaro/Clear grey - **37**

OPALE
OPAL
0

CRI90
6


Y.
5500K
6

4000K
7

3000K
8

DIM.
1-10V
A1

DALI
A2

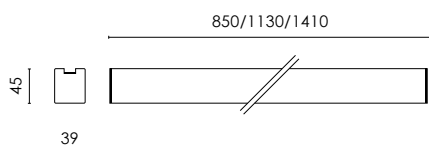

COD. ON/OFF	L.MM	W	LM
TNR.3102. 0 6 Y. Z	850	21W/230V LED	2930/2860/2700
TNR.3103. 0 6 Y. Z	1130	28W/230V LED	3920/3820/3620
TNR.3104. 0 6 Y. Z	1410	35W/230V LED	4910/4780/4540

ACCESSORI / ACCESSORIES



TNR.SO
Suspension kit (pair).



AAA.RA2
Rosone alimentato basic.
Power supply basic.



AAA.RA2.A2
Rosone alimentato DALI.
DALI power supply.





Stilo è un apparecchio da parete e sospensione singola che si affianca ai sistemi lineari CIVIC più conosciuti. Semplicità ed eleganza sono i pilastri di una struttura compatta, adattabile a qualsiasi contesto e atmosfera, in grado di ospitare driver anche dimmerabili fino a 35W di potenza.

Stilo is a wall and ceiling single light fitting, joining the most famous CIVIC linear lighting systems. Simplicity and elegance are the cornerstones of a compact structure, adaptable to any context and atmosphere. Stilo can host drivers also dimmable up to 35W.

APOLLO XS



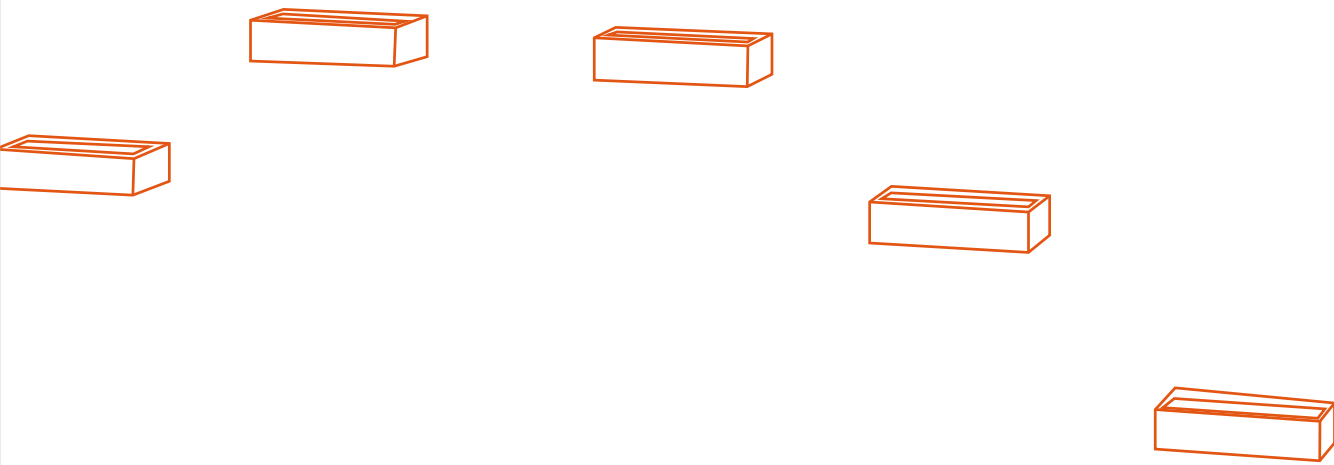


APOLLO XS

Struttura in fusione di alluminio verniciata a polveri epossipoliestere. Vetro temperato sabbato. Led Tono luce bianco 4000K o 3000K, emissione diretta e diretta indiretta. Potenze a partire da 6W/230V luce diretta fino a 12W/230V luce diretta/indiretta.

The structure is in die cast aluminium, powder coated, sanded tempered glass. Led 4000K or 3000K white light tone. Emission Direct or direct indirect. Power from 6W/230V with direct light up to 12W/230V with direct/indirect light.



CE	IP65
LED	RG1
CRI 80	Mac Adam 3
L80 B10	
50000H	Driver on/off incl.

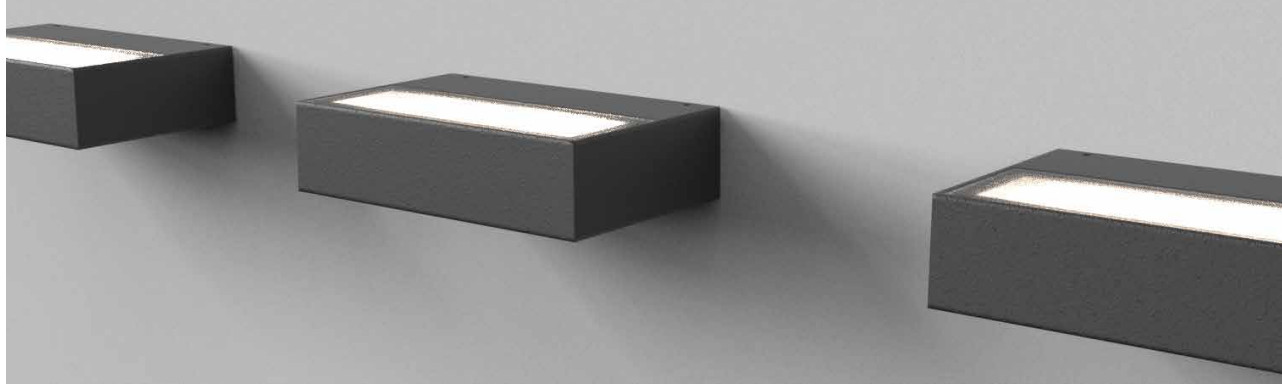

APOLLO XS

Z.
COLOR


- Antracite / Anthracite - **06**
- Bianco ragg. / Rough white - **32**
- Nero ragg. / Rough black - **33**
- Grigio chiaro / Clear grey - **37**
- Custom - **99**

D.
SABBIATO
SANDED **1**


CR180
5

Y.
4000K
7

3000K
8

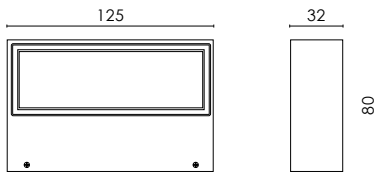

COD. ON/OFF	W	LM	EMISSIONE/EMISSION
MTA.5481. D 5 Y. Z	6W/230V LED	720/680	diretta/direct
MTA.5482. D 5 Y. Z	12W/230V LED	1440/1360	diretta+indiretta/direct+indirect






La famiglia Apollo diventa "più piccola" con la nuova versione XS. Prestazioni e semplicità sono le caratteristiche principali della Collezione Apollo che ora, grazie alle dimensioni compatte di Apollo XS, è diventata ancora più versatile. Apparecchio adatto a diversi ambienti, dagli spazi domestici ai grandi spazi architettonici, ideale per illuminare pareti e percorsi esterni

The Apollo family becomes "smaller" with the new XS version. Performance and simplicity are the main characteristics of Apollo Collection that now, thanks to the compact dimensions of Apollo XS, has become even more versatile. Luminaire suitable for different environments, from domestic to large architectural spaces, ideal for lighting outdoor walls and paths.

APOLLOXS

PROIETTORE

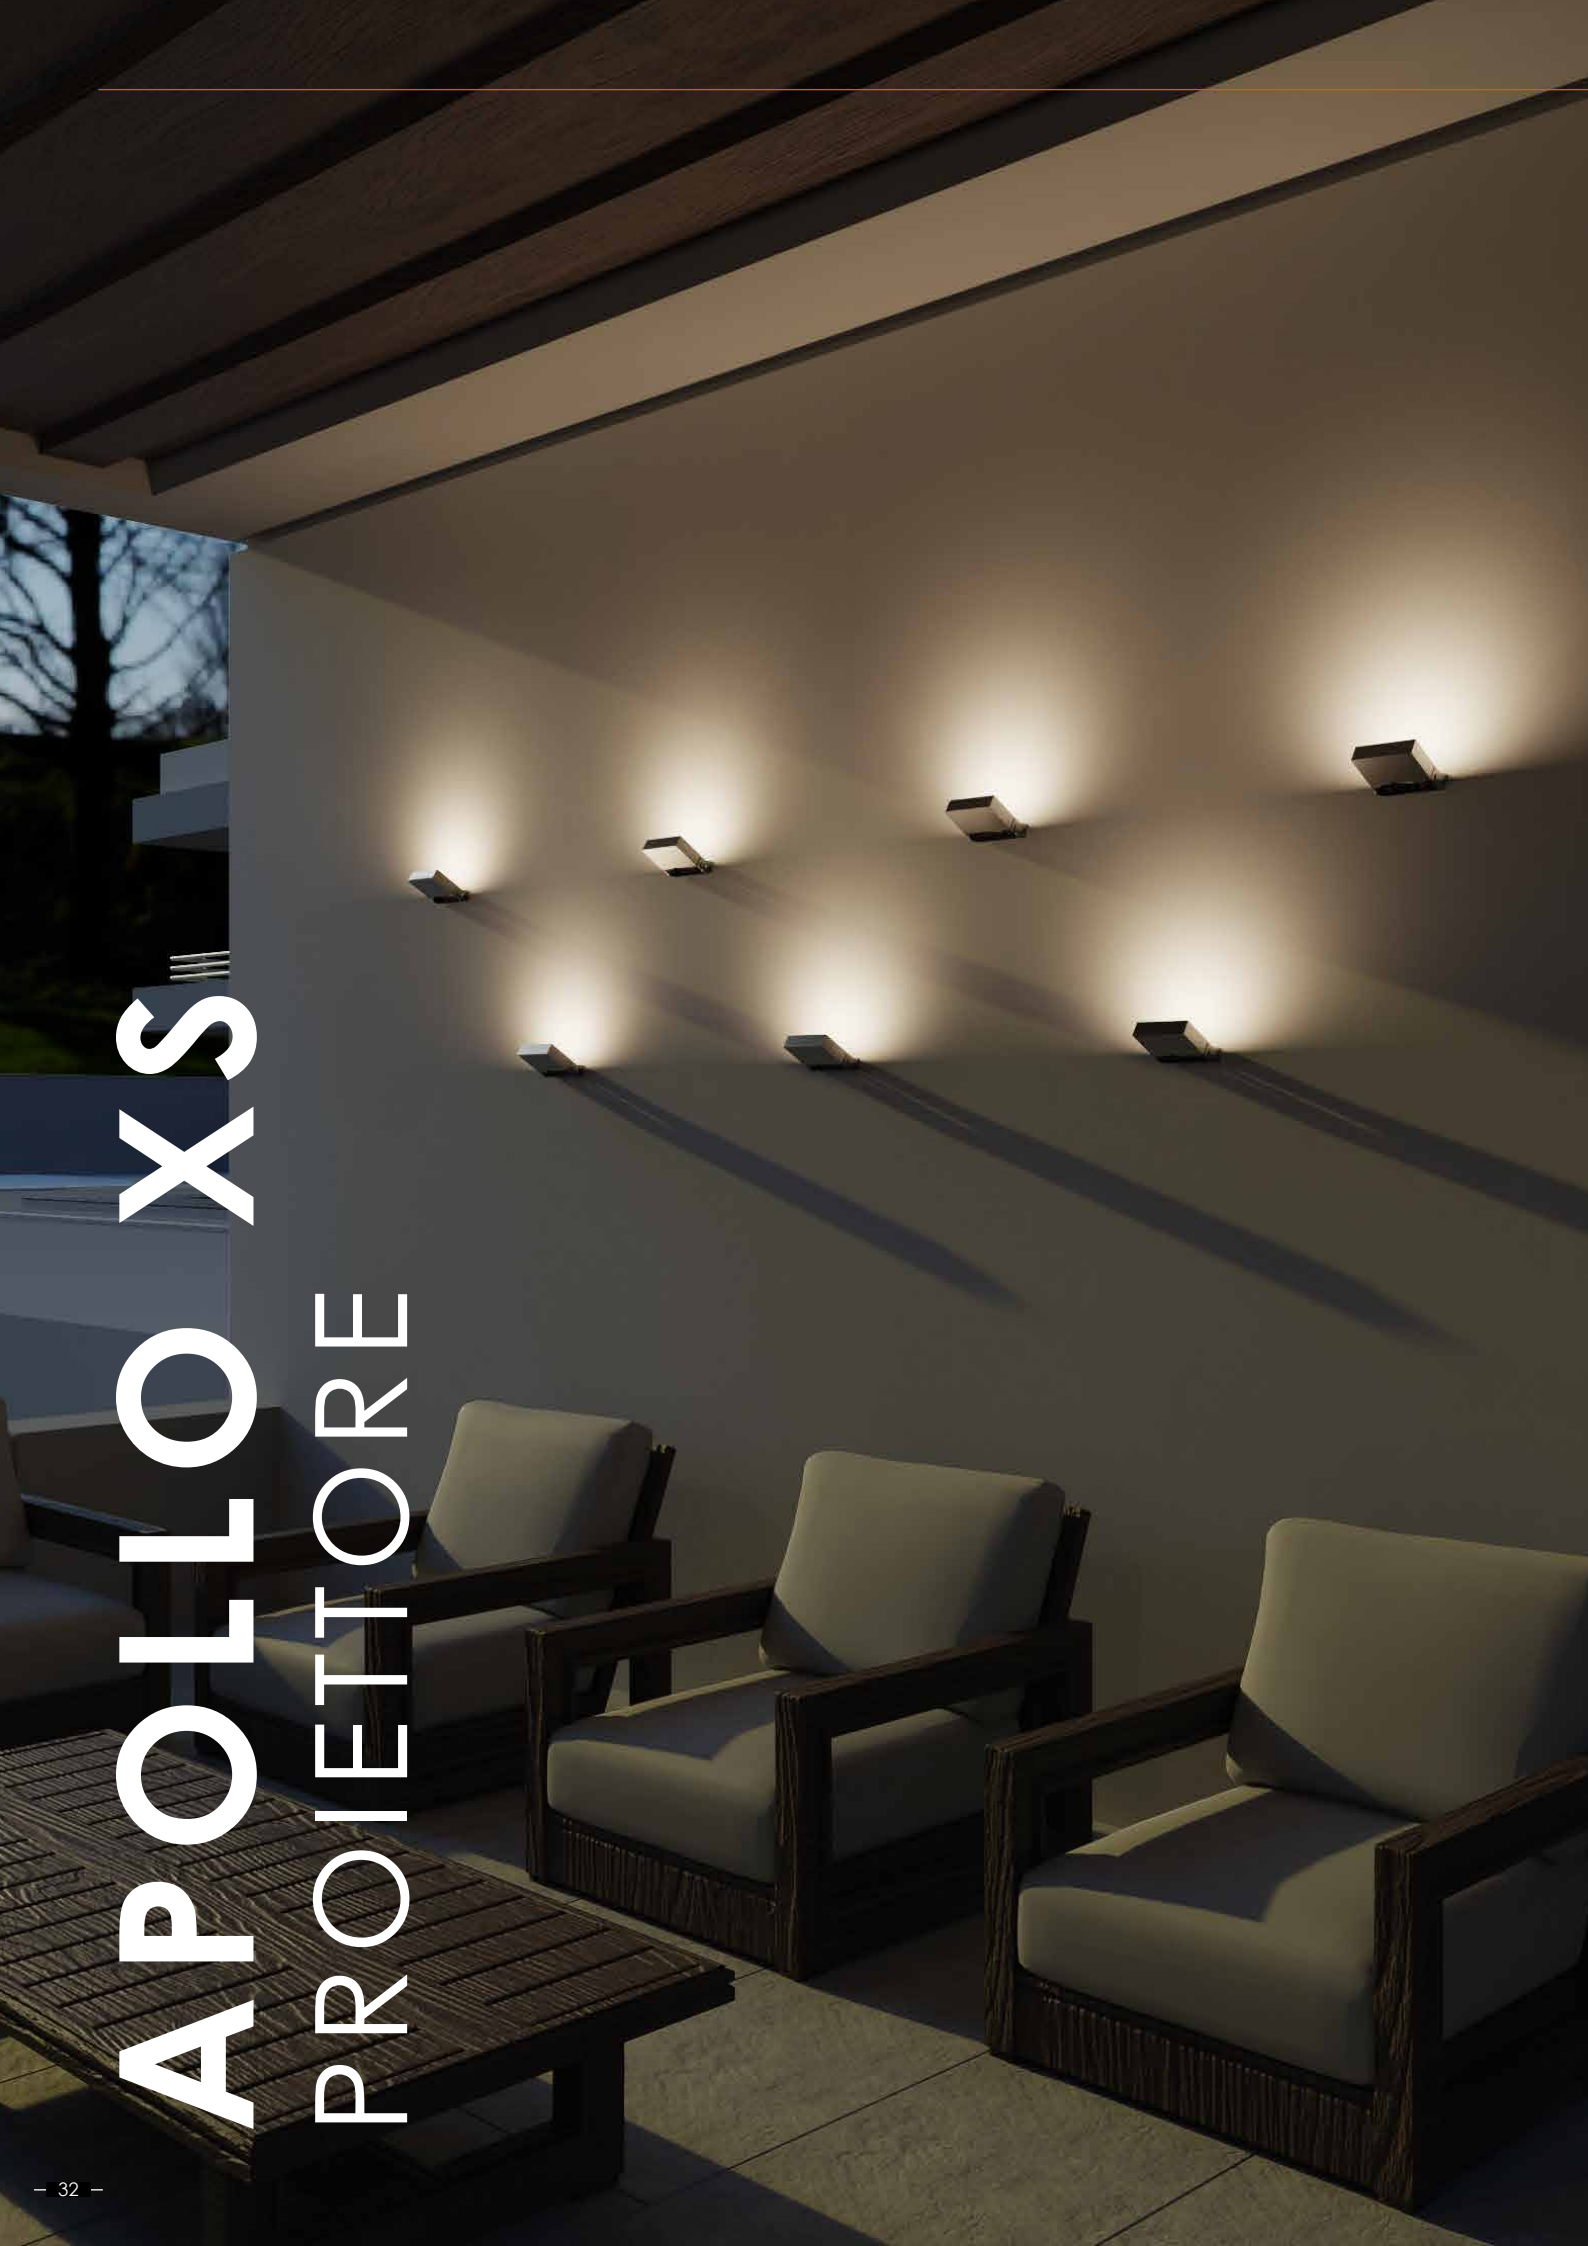


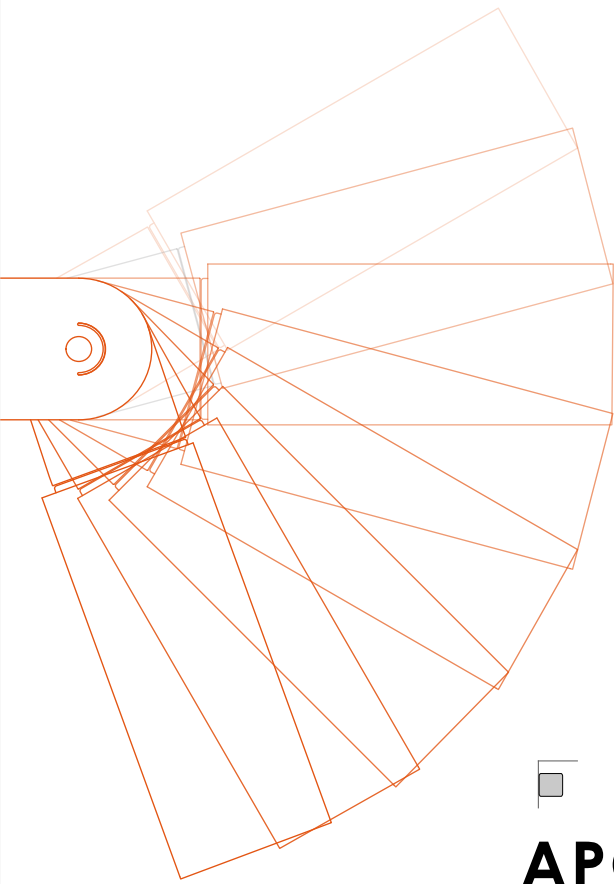

APOLLO XS PROIETTORE

Proiettore orientabile con struttura in fusione di alluminio, staffa in acciaio inox. Verniciatura a polveri epossipoliestere. Vetro temperato sabbato. Led Tono luce bianco 4000K o 3000K. Potenza 6W/230V.

Adjustable projector with the structure in die cast aluminium, Stainless steel bracket. Epoxy powder coating. Sanded tempered glass. Led 4000K or 3000K White light tone. Power 6W/230V.

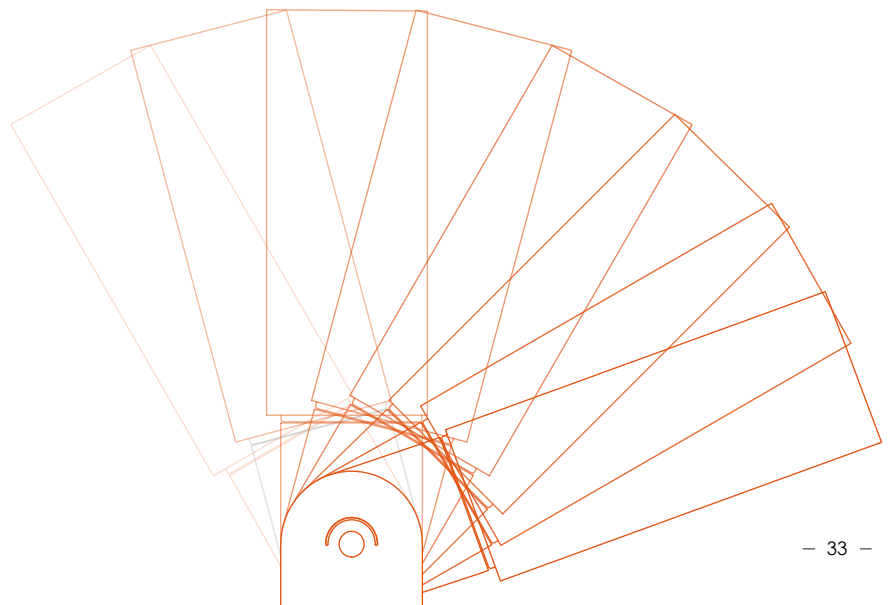

CE	IP65
LED	RG1
CRI 80	Mac Adam 3
L80 B10	
50000H	Driver on/off incl.



APOLLO XS


PROIETTORE

D.
SABBIATO
SANDED 1

CR180
5

Y.
4000K
7

3000K
8

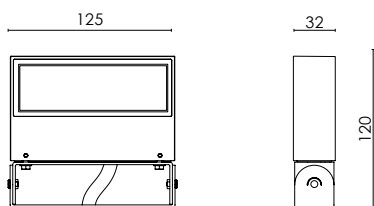

Z.
COLOR

- Antracite / Anthracite - 06
- Bianco ragg. / Rough white - 32
- Nero ragg. / Rough black - 33
- Grigio chiaro / Clear grey - 37
- Custom - 99

COD. ON/OFF	W	LM	EMISSIONE/EMISSION
MTA.5497. D 5 Y. Z	6W/230V LED	720/680	diretta/direct

ACCESSORI / ACCESSORIES



MTA.SP
Picchetto Inox.
Inox Spike.



AAA.CN2
Connettore IP68, 2 vie.
IP68 waterproof connector, 2 way.



AAA.CN3
Connettore IP68, 3 vie.
IP68 waterproof connector, 3 way.



AAA.CN4
Connettore IP68, 4vie.
IP68 waterproof connector, 4way.




La famiglia Apollo diventa "più piccola" con la nuova versione XS. Prestazioni e semplicità sono le caratteristiche principali della Collezione Apollo che ora, grazie alle dimensioni compatte di Apollo XS, è diventata ancora più versatile. Apparecchio adatto a diversi ambienti, dagli spazi domestici ai grandi spazi architettonici, ideale per illuminare pareti e percorsi esterni


The Apollo family becomes "smaller" with the new XS version. Performance and simplicity are the main characteristics of Apollo Collection that now, thanks to the compact dimensions of Apollo XS, has become even more versatile. Luminaire suitable for different environments, from domestic to large architectural spaces, ideal for lighting outdoor walls and paths.



APOLLO XS

PALETTO


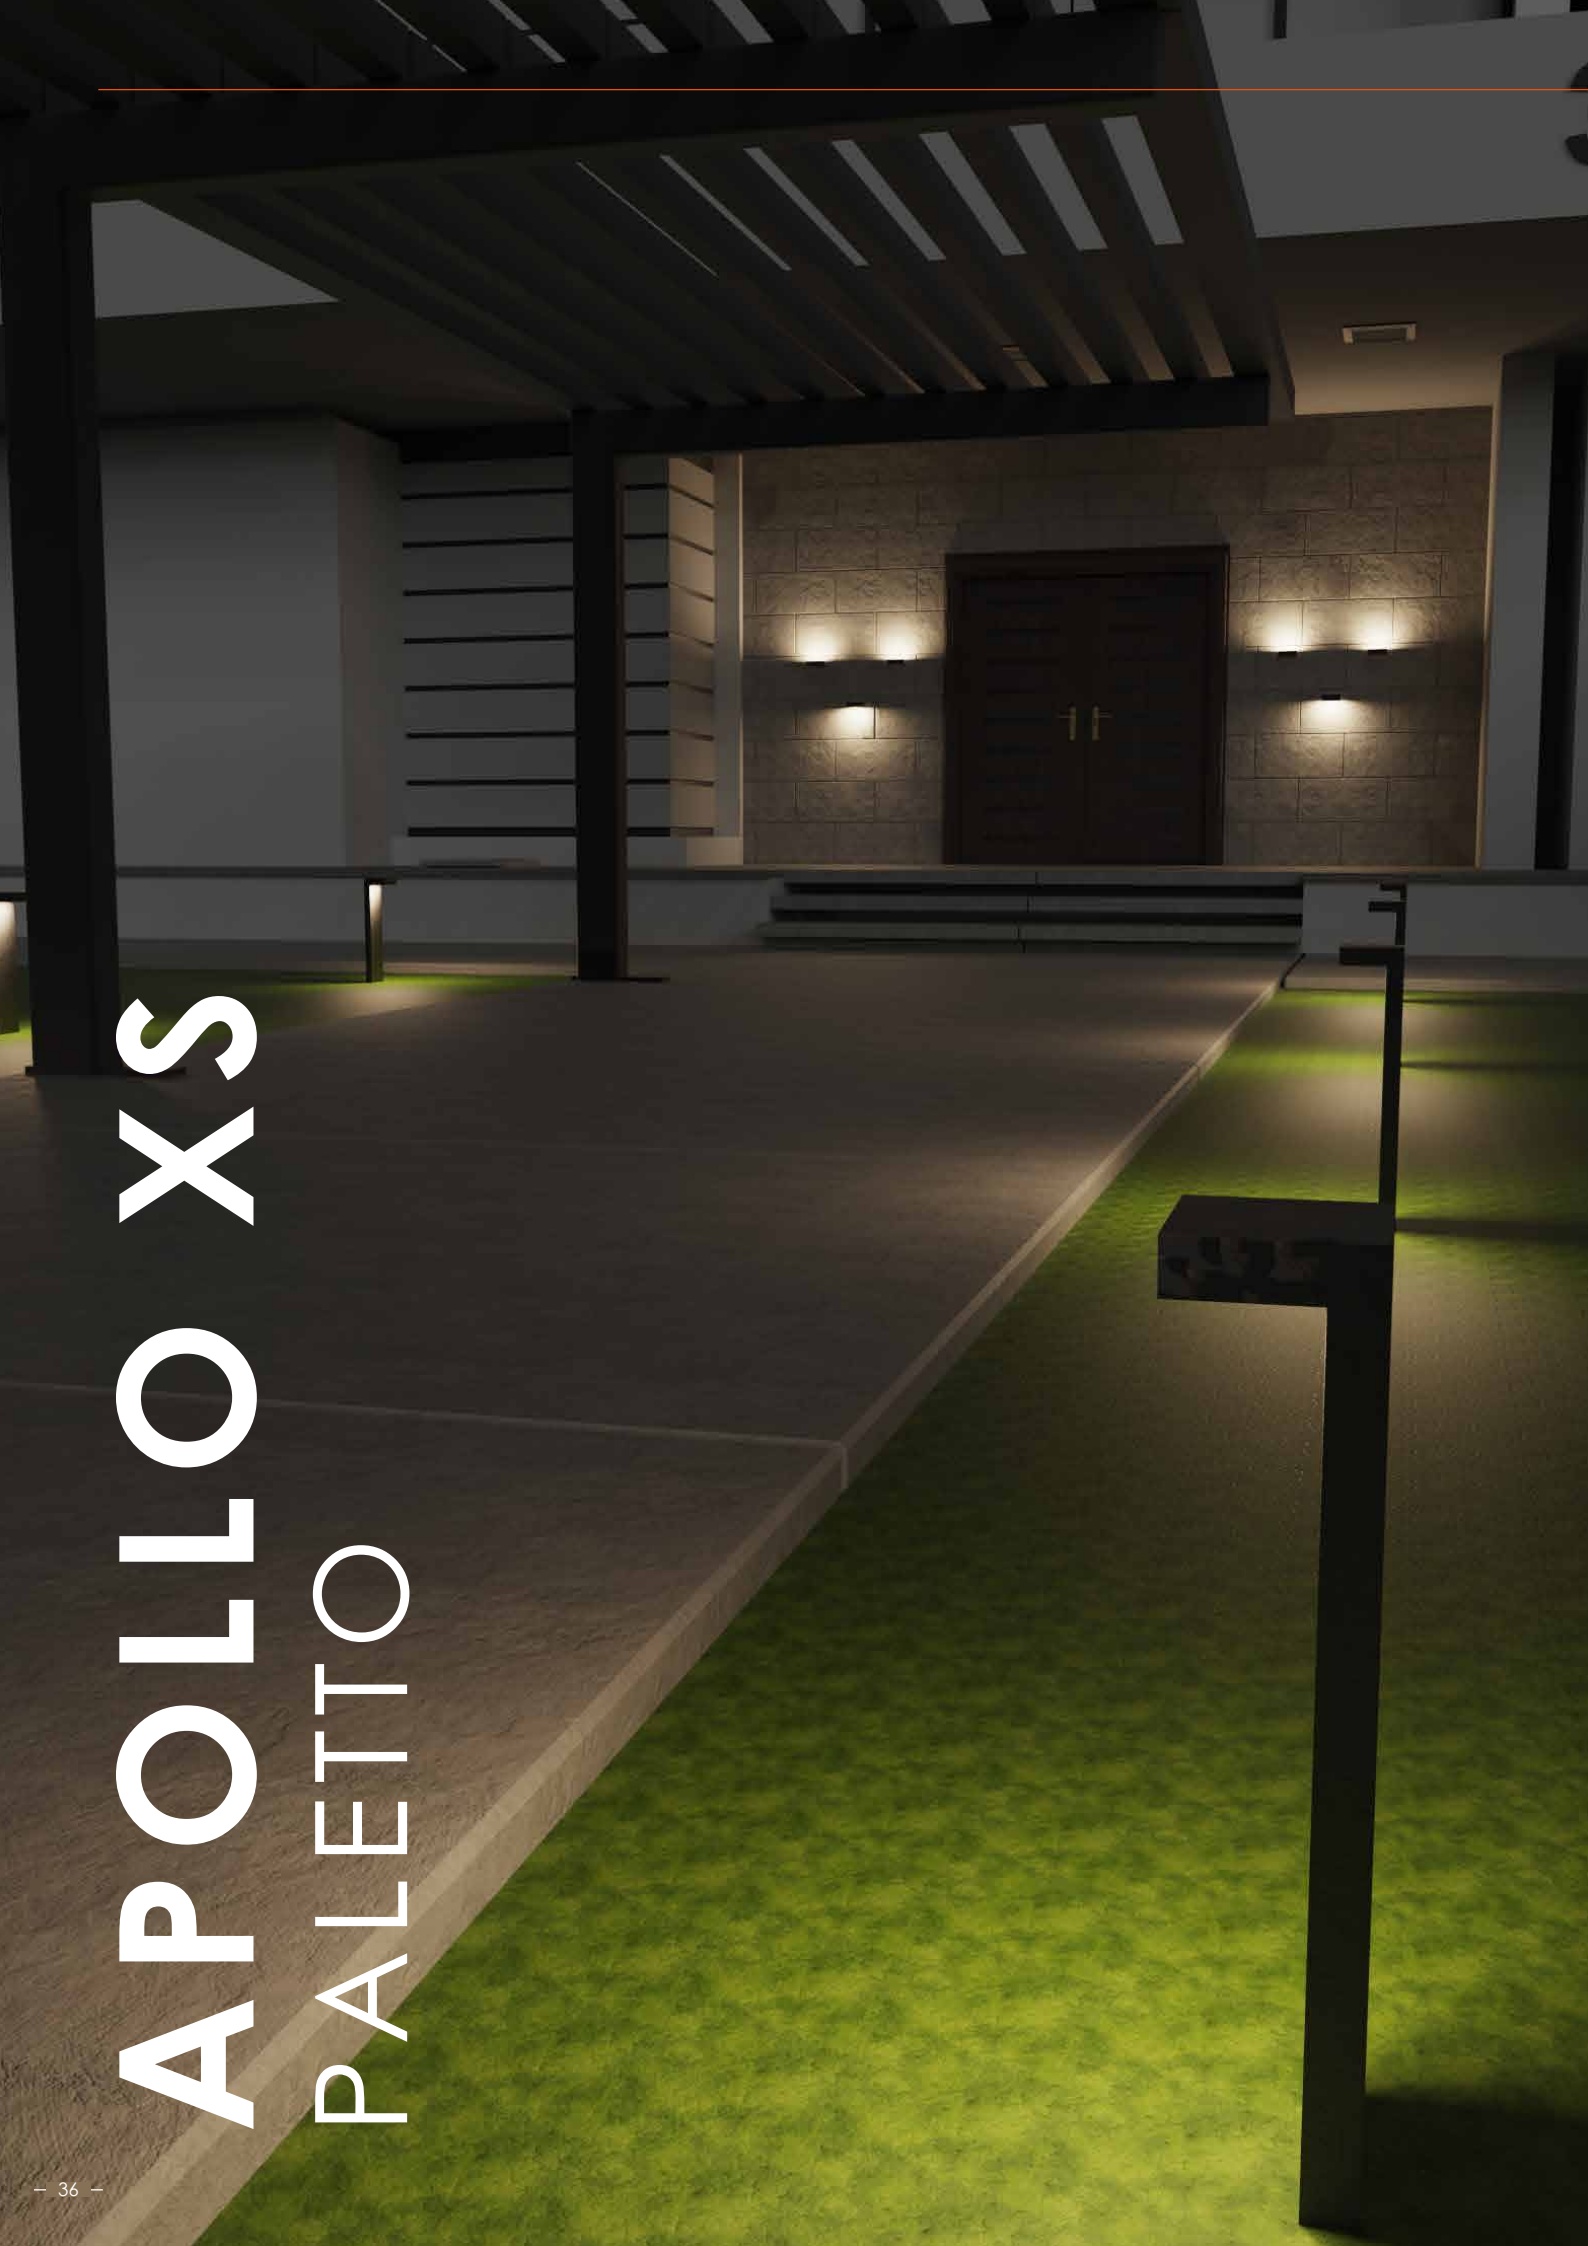


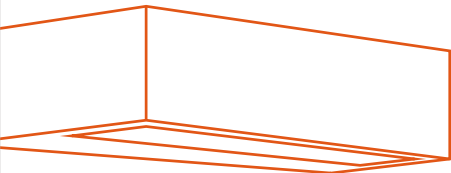


APOLLO XS PALETTO

Struttura in fusione di alluminio e acciaio inox. Verniciatura a polveri epossipoliestere. Vetro temperato sabbato. Led Tono luce bianco 4000K o 3000K, Potenza 6W/230V. Disponibile in due altezze: 200mm e 500mm.

The structure is in die cast aluminium and Stainless steel. Epoxy powder coating. Sanded tempered glass. Led 4000K or 3000K White light tone. Power 6W/230V. Available in two different heights: 200mm e 500mm.

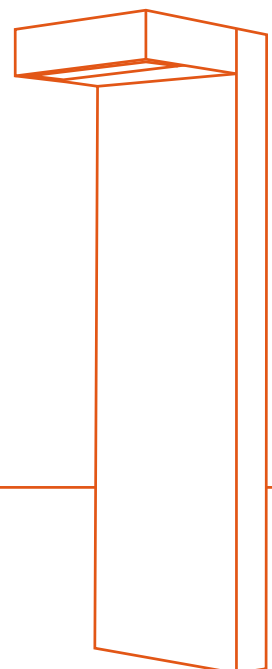

CE	IP65
LED	RG1
CRI 80	Mac Adam 3
L80 B10	
50000H	Driver on/off incl.



APOLLO XS


PALETTO

D.
SABBIATO
SANDED **1**






CR180
5

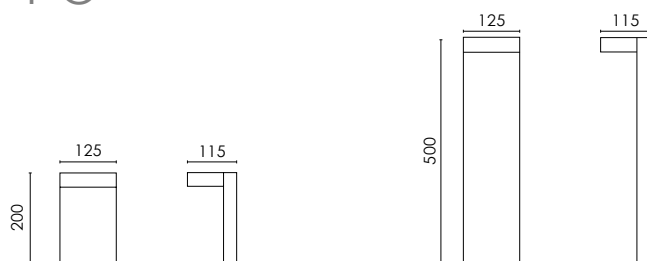Y.
4000K
7

3000K
8



Z.
COLOR

- Antracite / Anthracite - **06** 
- Bianco ragg. / Rough white - **32** 
- Nero ragg. / Rough black - **33** 
- Grigio chiaro / Clear grey - **37** 
- Custom - **99** 

COD. ON/OFF	H.MM	W	LM	EMISSIONE/EMISSION
MTA.5473. D 5 Y. Z	200	6W/230V LED	720/680	diretta/direct
MTA.5474. D 5 Y. Z	500	6W/230V LED	720/680	diretta/direct

ACCESSORI / ACCESSORIES



MTA.TF2
Tirafondi per muratura.
Pole fixing bolts.



La famiglia Apollo diventa "più piccola" con la nuova versione XS. Prestazioni e semplicità sono le caratteristiche principali della Collezione Apollo che ora, grazie alle dimensioni compatte di Apollo XS, è diventata ancora più versatile. Apparecchio adatto a diversi ambienti, dagli spazi domestici ai grandi spazi architettonici, ideale per illuminare pareti e percorsi esterni

The Apollo family becomes "smaller" with the new XS version. Performance and simplicity are the main characteristics of Apollo Collection that now, thanks to the compact dimensions of Apollo XS, has become even more versatile. Luminaire suitable for different environments, from domestic to large architectural spaces, ideal for lighting outdoor walls and paths.

PRODUTTORI

MANUFACTUR

VENDITORI SEL

CONSULENTI C

WE ARE CIVIC

MULTILANGUA

PROFESSIONIS

PROFESSIONA

ERS ARTIGIANI

LLERS

CONSULTANTS

MULTILINGUA

AGE

TI

LS

