

CALPESTABILI WALKABLE




Serie di incassi a terra di Civic ispirati all'analogia serie carrabile. L'abbinamento di estetica e performance rendono questa collezione particolarmente adatta ove la fonte luminosa diventi elemento di design. La famiglia è realizzata interamente in acciaio Inox offrendo resistenza e durata nel tempo.

This family of ground recessed fittings is inspired by the similar drive-over one. Performance and aesthetics makes this range suitable where the light source needs to be installed in a design contest. The construction entirely in stainless steel ensure reliability and quality along the time.

David
Raggio SS


Zante
Eric



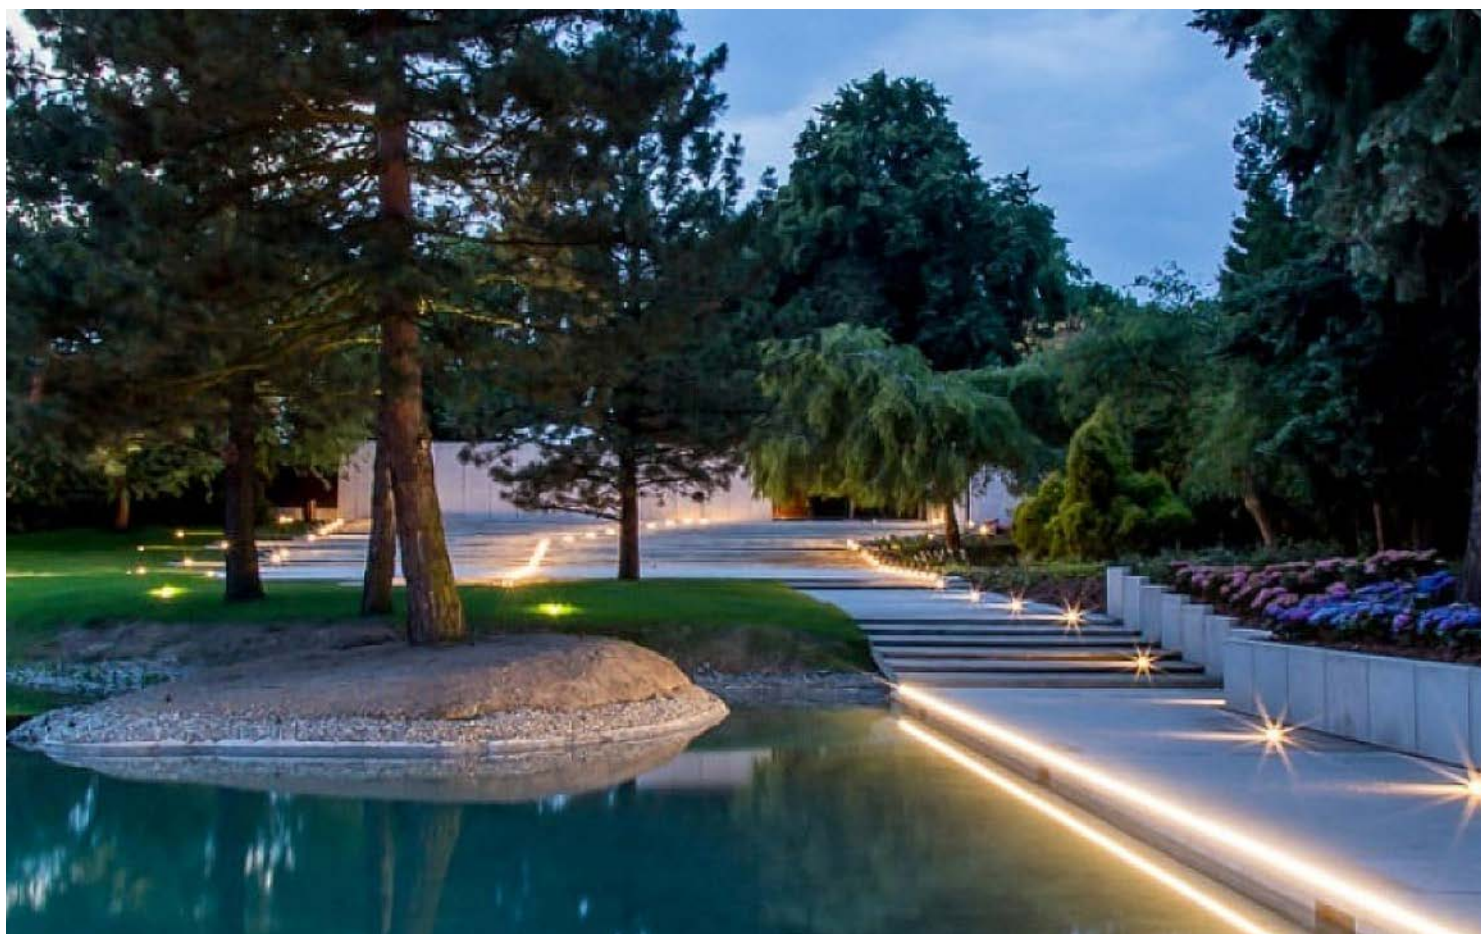




DAVID

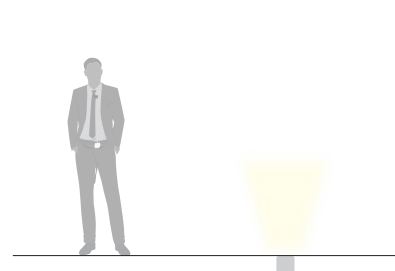


Corpo in acciaio inox AISI 304 e anello di chiusura in AISI 316L. Grado di protezione IP67. Schermo di protezione in vetro trasparente temperato di spessore 10mm con resistenza meccanica IK10 per passaggio pedonale. Guarnizione in gomma al silicone. Ottica fissa o orientabile. Equipaggiato con LED di colore bianco 4000K, 3000K o 2700K con potenza 9W o con portalamпада GU10, fornito completo di driver integrato nella struttura e di cavo di collegamento H05RN-F 3x1mm². Disponibile anche nella versione RGBW con potenza 6W.

Structure made of AISI 304 stainless steel and closing ring made of AISI 316L. IP67 protection degree. Protection shield made of tempered transparent glass with 10mm thickness and IK10 shock resistance for walk-over use. Silicone rubber gasket. Fixed or adjustable optic. Equipped with one LED in 4000K, 3000K or 2700K white light tone, power 9W or with GU10 lampholder, supplied with built-in driver and H05RN-F 3x1mm² connecting cable. Also available in RGBW version power 6W.



RAGGIO SS

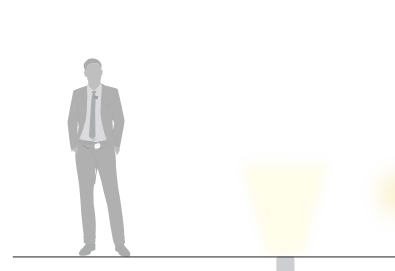

Corpo e anello di chiusura in acciaio inox. Grado di protezione IP67. Schermo di protezione in vetro trasparente temperato di spessore 10mm con resistenza meccanica IK10 per passaggio pedonale. Equipaggiato con un LED di colore bianco 4000K, 3000K o 2700K da alimentare con trasformatore in corrente costante da cablare in serie. Potenza 2W. Fornito completo di cavo di collegamento H05RN-F 2x1mm².

Body and closing ring in stainless steel. IP67 protection degree. Protection shield made of tempered transparent glass with 10mm thickness and IK10 shock resistance for walk-over use. Equipped with one LED in 4000K, 3000K or 2700K white light tone to be supplied with constant current driver (serial connection). Power 2W. Supplied with H05RN-F 2x1mm² connecting cable.

CE	LED
	IP67
230V 24V	
RG1	Driver on/off incl.
L80 B10	50000H
CRI 80/90	Recessed box incl.
IK10	



DAVID

D. OPTIC 36° 1

OPTIC 24° 2

OPTIC 12° 3



X. CRI80 5

CRI90 6

Y. 4000K 7

3000K 8

2700K 9

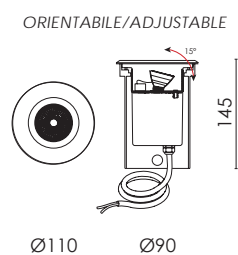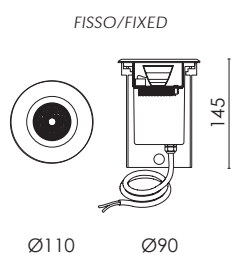

COD. ON/OFF

W

LM

DRIVER

FISSO/FIXED

DEO.6502. D X Y
DEO.35FGU

9W/230V LED
20W/230V GU10 lampada esclusa/lamp excluded

890/840/770

incorporato/built-in

ORIENTABILE/ADJUSTABLE

DEO.6503. D X Y
DEO.35MGU

9W/230V LED
20W/230V GU10 lampada esclusa/lamp excluded

890/840/770

incorporato/built-in



FISSO/FIXED RGBW



FASCIO/BEAM 25°

DEO.6502.299

6W/24V RGBW

395

escluso/excluded

ACCESSORI / ACCESSORIES



AAA.CN2
Connettore IP68, 2 vie.
IP68 waterproof connector, 2 way.



AAA.CN3
Connettore IP68, 3 vie.
IP68 waterproof connector, 3 way.



AAA.CN4
Connettore IP68, 4 vie.
IP68 waterproof connector, 4 way.



DEO.MS
Master DEO RGBW.



AAA.TRSL27N
Centralina di controllo RGBW.
RGBW control unit.




DEO.FG
Vetro sabbato.
Sanded glass.



CE	LED
III	IP67
RG1	Driver escl./excl.
L80 B10	50000H
CRI 90	Recessed box incl.
IK10	Calpestabile Walkable

RAGGIO SS



- D.** OPTIC 15° **1**
- OPTIC 60° **2**
- CRI90 **6**
- Y.** 4000K **7**
- 3000K **8**
- 2700K **9**

COD. ON/OFF

W

LM

DRIVER

LAA.5111. **D 6 Y**

2W/24V

209/180/172

escluso/excluded

ACCESSORI / ACCESSORIES



AAA.TRSL08
LED Driver IP20 30W 24V.



AAA.TRSL13
LED Driver IP67 70W 24V.



AAA.CN2
Connettore IP68, 2 vie.
IP68 waterproof connector, 2 way.



AAA.CN3
Connettore IP68, 3 vie.
IP68 waterproof connector, 3 way.



AAA.CN4
Connettore IP68, 4 vie.
IP68 waterproof connector, 4 way.