

ROUND



Profilo tubolare semplice e funzionale. Disponibile in diverse lunghezze per adattarsi ai diversi ambienti ed alle più svariate soluzioni di arredo. Pensato per l'ufficio trova la sua collocazione anche in ambienti domestici quali ingressi, corridoi e disimpegni.


Simple and functional tubular profile. Available in different lengths to adapt to different environments and to the most varied furnishing solutions. Designed for the office, it also finds its place in domestic environments such as entrances, corridors and hallways.



ROUND

Round è un apparecchio di illuminazione tubolare per interni installabile singolarmente o in file continue con un effetto luminoso ininterrotto.

Round is a tubular lighting fitting for indoor that can be installed alone or in continuous lines with an uninterrupted lighting effect.

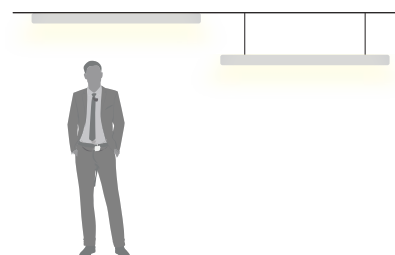

CE	LED
IP20	
RG0	Driver on/off incl.
L80 B10	50000H
CRI 80/90	



ROUND

Z.
COLOR

bianco/white - **02** 
nero/black - **03** 
custom - **99** 

OPALE
OPAL
0

X.
CRI80
5

CRI90
6

Y.
5000K
6



4000K
7

3000K
8

2700K
9

DIM

A2

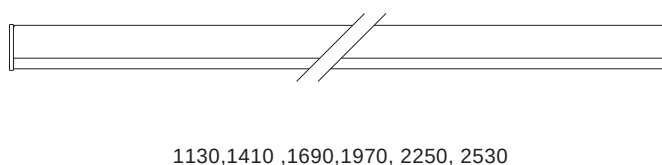

COD. ON/OFF

L.MM

W

LM

F65.3613. 0 X Y. Z	1130	28W/230V LED	3920/3820/3620/3560
F65.3614. 0 X Y. Z	1410	35W/230V LED	4910/4780/4540/4468
F65.3615. 0 X Y. Z	1690	42W/230V LED	5880/5730/5430/5340
F65.3616. 0 X Y. Z	1970	49W/230V LED	6870/6690/6350/6248
F65.3617. 0 X Y. Z	2250	56W/230V LED	7840/7640/7240/7120
F65.3618. 0 X Y. Z	2530	63W/230V LED	8830/8600/8160/8028

ACCESSORI / ACCESSORIES




AAA.RA2
Rosone alimentato basic.
Power supply basic.



TNI.DP
Attacco a plafone (coppia).
Ceiling bracket (pair).



AAA.SO
Sospensioni L.1700mm (coppia).
Suspension kit L.1700mm (pair).



F65.TE
Testata di chiusura.
End cap.



F65.CD
Giunto lineare.
Linear joint.

