

SPIDER

Famiglia di incassi a pavimento per uso esterno disponibile in più versioni con diverse tipologie di fasci. Possono essere utilizzati singolarmente o in fila continua, per installazioni a parete o a pavimento. Sono adatti ad illuminare corridoi, portici o camminamenti, ma anche grandi opere architettoniche o open-space.


Family of floor recessed luminaires for outdoor use available in several versions with different types of beams, they can be used individually or in a continuous row, for wall or floor installations. They are suitable for lighting corridors, porches or walkways, but also for large architectural works and open-spaces.

Spider Recessed



Spider Recessed RGB




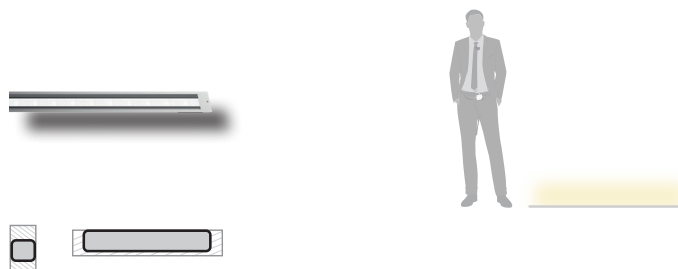

SPIDER RECESSED

Struttura in alluminio estruso con finitura anodizzata ad elevata resistenza all'ossidazione. Testate in lega di alluminio pressofuso. Diffusore in vetro temperato spessore 6 mm, satinato per luce diffusa o trasparente con lenti. Viti a brugola in acciaio INOX A4. Apparecchio precablato con cavo in neoprene, guarnizioni in silicone ricotto. Tono luce bianco 4000K o 3000K, Potenze da 12.5W/660mm a 28W/1260mm. Alimentatore elettronico incluso. Cassaforma da ordinare separatamente.

The structure is made of extruded aluminum, anodized finishing with high resistance against corrosion, end-caps in aluminum alloy, tempered glass diffuser 6mm thick, frosted for diffuse light or transparent with lenses. Screws in stainless steel A4, prewired with neoprene cable, silicone gaskets. 4000K or 3000K LED white tone, from 12.5W/660mm to 28W/1260mm power. Electronic driver included. Recessed box in steel to be ordered separately.

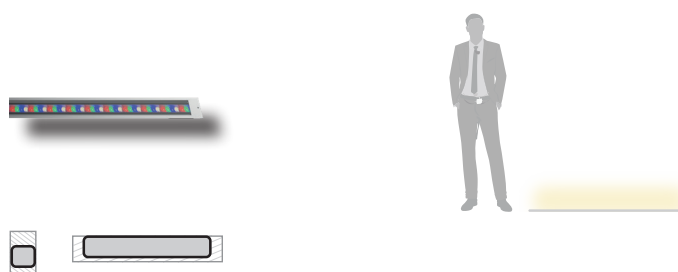


SPIDER RECESSED RGB



Struttura in alluminio estruso finitura anodizzato ad elevata resistenza all'ossidazione. Testate in lega di alluminio pressofuso. Diffusore in vetro temperato spessore 6 mm trasparente con lenti. Viti a brugola in acciaio INOX A4. Apparecchio precablato con cavo in neoprene, guarnizioni in silicone ricotto. Potenze da 18led/960mm a 27led /1260mm. Alimentatore e cassaforma da ordinare separatamente.

The structure is made of extruded aluminum, anodized finishing with high resistance against corrosion, end-caps in aluminum alloy, tempered glass diffuser 6mm thick, transparent with lenses. Screws in stainless steel A4, prewired with Neoprene Cable, Silicon Gaskets, from 18leds/960mm to 27leds/1260mm power. Electronic driver and recessed box in steel to be ordered separately.

CE	IP67
LED	RG1
CRI 80	Driver on/off incl.
L80 B10	50000H
	MacAdam 3

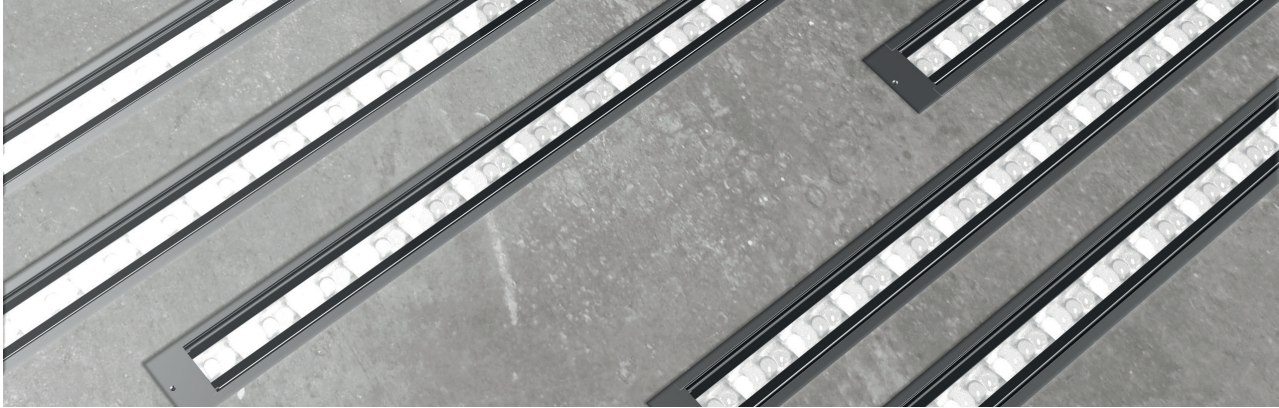



SPIDER

RECESSED

Z.
COLOR


- anodizzato/anodised **-05**
- antracite/anthracite **-06**
- grigio chiaro opaco/clear matte grey **-37**
- custom **-99**

- 15°
1
- 30°
2
- 10x45°
3
- 11x30°
4
- CRI80
5
- Y.
4000K
7
- 3000K
8
- DIM.
1-10V
A1
- DALI
A2



COD. ON/OFF	L.MM	W	LM	FASCIO / BEAM
JAD.5816.0 5 Y. Z	660	12.5W/230V LED	1585/1502	diffuso/diffuse 120° SYM
JAD.5821.1 5 Y. Z	660	14x1.2W/230V LED	1502/1295	stretto/narrow 15° ASYM
JAD.5821.2 5 Y. Z	660	14x1.2W/230V LED	1502/1295	largo/wide 30° ASYM
JAD.5821.3 5 Y. Z	660	14x1.2W/230V LED	1502/1295	ellittico/ellip. 10x45° ASYM
JAD.5821.4 5 Y. Z	660	14x1.2W/230V LED	1502/1295	ellittico/ellip. 11x30° ASYM
JAD.5818.0 5 Y. Z	1260	25W/230V LED	3170/3004	diffuso/diffuse 120° SYM
JAD.5823.1 5 Y. Z	1260	28x1.2W/230V LED	3016/2590	stretto/narrow 15° ASYM
JAD.5823.2 5 Y. Z	1260	28x1.2W/230V LED	3016/2590	largo/wide 30° ASYM
JAD.5823.3 5 Y. Z	1260	28x1.2W/230V LED	3016/2590	ellittico/ellip. 10x45° ASYM
JAD.5823.4 5 Y. Z	1260	28x1.2W/230V LED	3016/2590	ellittico/ellip. 11x30° ASYM


ACCESSORI / ACCESSORIES



JAD.C24 L.691mm.
JAD.C54 L.1291mm.
Cassaforma per incasso.
Recessed housing.



JAD.PC
Pressacavo IP67.
Cable gland IP67.



DUC.MF3
Gancio di fissaggio (coppia)
Fixing hook (pair)




AAA.CN3
Connettore IP68, 3vie
IP68 waterproof connector, 3way



JAD.CA
Cavo anticaduta.
Suspension cable



AAA.CN4
Connettore IP68, 4vie.
IP68 waterproof connector, 4way

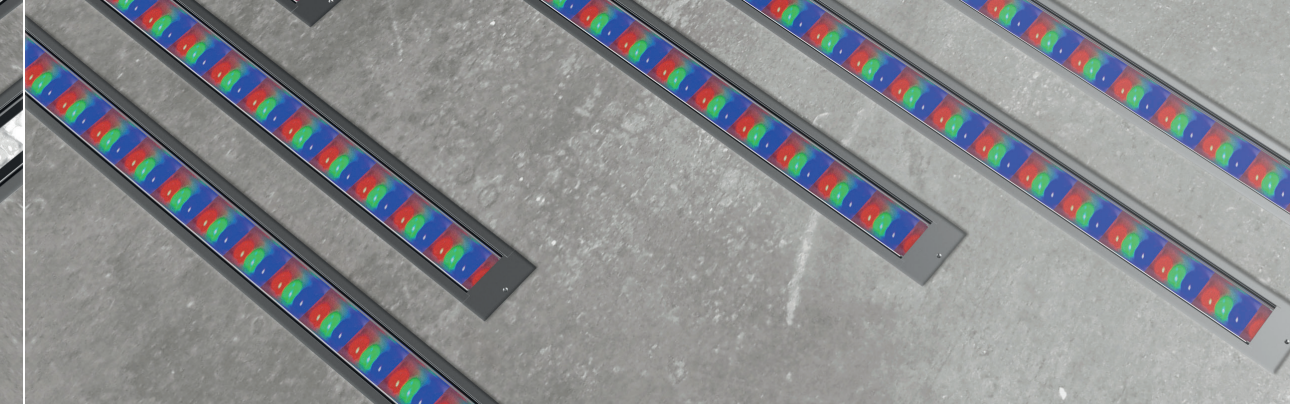



CE	IP67
LED	RG1
Mac Adam 3	50000H
L80 B10	RGB

	05- anodizzato/anodised
	06- antracite/anthracite
	37- grigio chiaro opaco/clear matte grey
	99- custom

Z.
COLOR

SPIDER


RECESSED RGB



D.	15°	1
	30°	2
	10X45°	3
	11X30°	4

COD. ON/OFF	L.MM	W	LM	FASCIO / BEAM	DRIVER
JAD.5837.D 99. Z	960	18x1.2W/230V RGB	478	ASYM	driver escluso/ driver excluded
JAD.5838.D 99. Z	1260	27x1.2W/230V RGB	718	ASYM	driver escluso/ driver excluded


ACCESSORI / ACCESSORIES



JAD.C21 L.991mm.
JAD.C54 L.1291mm.
Cassaforma per incasso.
Recessed housing.



AAA.TRSL23
Driver RGB
Driver RGB



DUC.MF3
Gancio di fissaggio (coppia).
Fixing hook (pair)



AAA.TRSL26
Controllo ad infrarossi.
Infrared system



JAD.CA
Cavo anticaduta.
Suspension cable



AAA.TRSL27
Centralina di controllo DMX.
DMX control unit.



JAD.PC
Pressacavo IP67.
Cable gland IP67.



AAA.CN3
Connettore IP68, 3vie.
IP68 waterproof connector, 3way.



AAA.TRSL25
Interfaccia DMX.
DMX interface.



AAA.CN4
Connettore IP68, 4vie.
IP68 waterproof connector, 4way.