
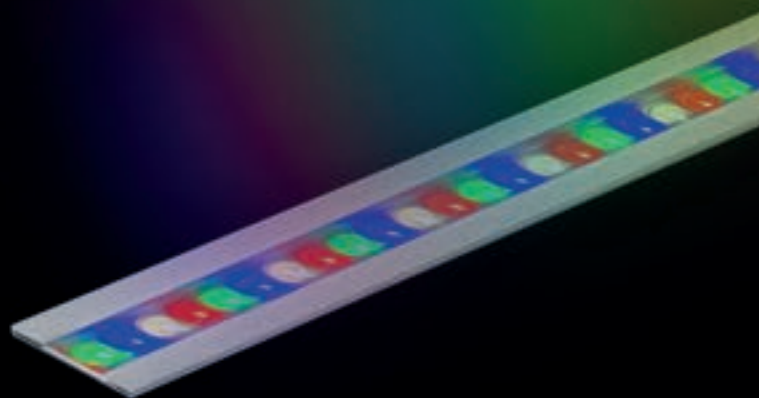


# CABRIO

Cabrio  
Cabrio RGBW


Famiglia di apparecchi lineari per esterno dal design contemporaneo che ci aiuta inserire la luce dove l'architettura l'ha sottratta: facciate di edifici, volte, portoni e pensiline. Grazie ai molteplici fasci disponibili è facile trovare la soluzione che più si adatta alle proprie esigenze che siano quelle di far risaltare un dettaglio o di realizzare un'illuminazione funzionale e/o decorativa.

A family of linear outdoor luminaires with a contemporary design that helps us insert light where architecture has stolen it: building facades, vaults, doors and canopies. Thanks to the multiple beams available, it is easy to find the solution that best suits your needs, whether they are to bring out a detail or to create functional and/or decorative lighting.

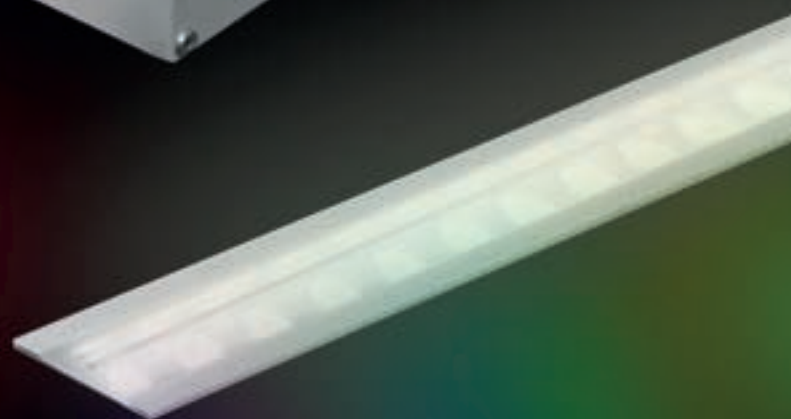

Cabrio Recessed  
Cabrio Recessed RGBW






## CABRIO

Struttura interamente in alluminio estruso con finitura anodizzata ad elevata resistenza all'ossidazione. Diffusore in vetro temperato spessore 6 mm, satinato per luce diffusa o trasparente con lenti. Viti a brugola in acciaio INOX A4. Apparecchio precablato con cavo in neoprene, guarnizioni in silicone ricotto. Tono luce bianco 4000K o 3000K, Potenze da 12.5W/605mm a 28x1.2W/1205mm. Alimentatore elettronico incluso.


The structure is made of extruded aluminum, anodized finishing with high resistance against corrosion, tempered glass diffuser 6mm thick, frosted for diffuse light or transparent with lenses. Screws in stainless steel A4, prewired with neoprene cable, silicone gaskets. 4000K or 3000K LED white tone, from 12.5W/605mm to 28x1.2W/1205mm power. Electronic driver included.



## CABRIO RGBW

Struttura interamente in alluminio estruso con finitura anodizzata ad elevata resistenza all'ossidazione. Diffusore in vetro temperato spessore 6 mm, satinato per luce diffusa o trasparente con lenti. Viti a brugola in acciaio INOX A4. Apparecchio precablato con cavo in neoprene, guarnizioni in silicone ricotto. Tono luce RGBW. Potenze da 24x1.2W/615mm a 48x1.2W/1215mm. Driver DMX incluso.





The structure is made of extruded aluminum, anodized finishing with high resistance against corrosion, tempered glass diffuser 6mm thick, frosted for diffuse light or transparent with lenses. Screws in stainless steel A4, prewired with neoprene cable, silicone gaskets. RGBW tone, from 24x1.2W/615mm to 48x1.2W/1215mm power. DMX driver included.

CE	IP65
<b>LED</b>	<b>RG1</b>
CRI 80	Driver on/off incl.
L80 B10	50000H
	Mac Adam 3



# CABRIO

**Z.**  
**COLOR**

- anodizzato/anodised -05 
- antracite/anthracite -06 
- grigio chiaro opaco/clear matte grey -37 
- custom -99 

15°  
**1**

30°  
**2**

10x45°  
**3**

11x30°  
**4**


CR180  
**5**

Y.  
4000K  
**7**

3000K  
**8**

DIM.  
1-10V  
**A1**

DALI  
**A2**



COD. ON/OFF	L.MM	W	LM	FASCIO / BEAM
<b>JEC.5916.0 5 Y. Z</b>	605	12.5W/230V LED	1585/1502	diffuso/diffuse 120°
<b>JEC.5921.1 5 Y. Z</b>	605	14x1.2W/230V LED	1502/1295	stretto/narrow 15°
<b>JEC.5921.2 5 Y. Z</b>	605	14x1.2W/230V LED	1502/1295	largo/wide 30°
<b>JEC.5921.3 5 Y. Z</b>	605	14x1.2W/230V LED	1502/1295	ellittico/elliptical 10x45°
<b>JEC.5921.4 5 Y. Z</b>	605	14x1.2W/230V LED	1502/1295	ellittico/elliptical 11x30°
<b>JEC.5918.0 5 Y. Z</b>	1205	25W/230V LED	3170/3004	diffuso/diffuse 120°
<b>JEC.5923.1 5 Y. Z</b>	1205	28x1.2W/230V LED	3016/2590	stretto/narrow 15°
<b>JEC.5923.2 5 Y. Z</b>	1205	28x1.2W/230V LED	3016/2590	largo/wide 30°
<b>JEC.5923.3 5 Y. Z</b>	1205	28x1.2W/230V LED	3016/2590	ellittico/elliptical 10x45°
<b>JEC.5923.4 5 Y. Z</b>	1205	28x1.2W/230V LED	3016/2590	ellittico/elliptical 11x30°

## ACCESSORI / ACCESSORIES



**JEC.AP**  
Attacchi a parete (coppia).  
Wall mount (pair).



**AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.



**JEC.APR**  
Ganci di fissaggio regolabili (coppia).  
Fixing adjustable hook (pair).



**AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.



CE	IP65
LED	RG1
Mac Adam 3	50000H
L80 B10	RGBW
⏚	

- 05-** anodizzato/anodised
- 06-** antracite/anthracite
- 37-** grigio chiaro opaco/clear matte grey
- 99-** custom

**Z.**  
COLOR

# CABRIO

## RGBW




**D.**  
15°  
1

30°  
2

10X45°  
3

COD. ON/OFF	L.MM	W	DRIVER
			RGBW
<b>JEC.5931.D 99. Z</b>	615	24x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included
<b>JEC.5932.D 99. Z</b>	915	36x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included
<b>JEC.5933.D 99. Z</b>	1215	48x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included

### ACCESSORI / ACCESSORIES



**AAA.TRSL27N**  
Centralina di controllo RGBW.  
RGBW control unit.



**JEC.AP**  
Attacchi a parete (coppia).  
Wall mount (pair).



**JEC.APR**  
Ganci di fissaggio (coppia).  
Fixing hook (pair).



**AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.



**AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.






## CABRIO RECESSED

Struttura interamente in alluminio estruso con finitura anodizzata ad elevata resistenza all'ossidazione. Diffusore in vetro temperato spessore 6 mm, satinato per luce diffusa o trasparente con lenti. Viti a brugola in acciaio INOX A4. Apparecchio precablato con cavo in neoprene, guarnizioni in silicone ricotto. Tono luce bianco 4000K o 3000K, Potenze da 12.5W/605mm a 28x1.2W/1205mm. Alimentatore elettronico incluso. L'apparecchio va utilizzato con l'apposita cassaforma in lamiera di acciaio zincato zincato dotata di alette per impedirne la deformazione da ordinare separatamente.

The structure is made of extruded aluminum, anodized finishing with high resistance against corrosion, tempered glass diffuser 6mm thick, frosted for diffuse light or transparent with lenses. Screws in stainless steel A4, prewired with Neoprene Cable, Silicone Gaskets. 4000K or 3000K LED white tone, from 12.5W/605mm to 28x1.2W/1205mm power. Electronic driver included. Recessed box in steel to be ordered separately.




## CABRIO RECESSED RGBW

Struttura interamente in alluminio estruso con finitura anodizzata ad elevata resistenza all'ossidazione. Diffusore in vetro temperato spessore 6 mm, satinato per luce diffusa o trasparente con lenti. Viti a brugola in acciaio INOX A4. Apparecchio precablato con cavo in neoprene, guarnizioni in silicone ricotto. Tono luce RGBW, Potenze da 24x1.2W/615mm a 48x1.2W/1215mm. Driver DMX incluso. L'apparecchio va utilizzato con l'apposita cassaforma in lamiera di acciaio zincato zincato dotata di alette per impedirne la deformazione da ordinare separatamente.

The structure is made of extruded aluminum, anodized finishing with high resistance against corrosion, tempered glass diffuser 6mm thick, frosted for diffuse light or transparent with lenses. Screws in stainless steel A4, prewired with Neoprene Cable, Silicon Gaskets. RGBW tone, power from 24x1.2W /615mm to 48x1.2W/1215mm power. DMX driver included.







CE	IP67
LED	RG1
CRI 80	Driver on/off incl.
L80 B10	50000H
	MacAdam 3



# CABRIO

## RECESSED

Z	anodizzato/anodised -05	
COLOR	antracite/anthracite -06	
	grigio chiaro opaco/clear matte grey -37	
	custom -99	

15°  
1

30°  
2

10x45°  
3

11x30°  
4



CRI80  
5

Y.  
4000K  
7

3000K  
8

DIM.  
1-10V  
A1

DALI  
A2



COD. ON/OFF	L.MM	W	LM	FASCIO / BEAM
<b>JED.5916.0 5 Y. Z</b>	605	12.5W/230V LED	1585/1502	diffuso/diffuse 120° SYM
<b>JED.5951.1 5 Y. Z</b>	605	14x1.2W/230V LED	1502/1295	stretto/narrow 15° SYM
<b>JED.5951.2 5 Y. Z</b>	605	14x1.2W/230V LED	1502/1295	largo/wide 30° SYM
<b>JED.5951.3 5 Y. Z</b>	605	14x1.2W/230V LED	1502/1295	ellittico/ellip.10x45° SYM
<b>JED.5951.4 5 Y. Z</b>	605	14x1.2W/230V LED	1502/1295	ellittico/ellip. 11x30° SYM
<b>JED.5918.0 5 Y. Z</b>	1205	25W/230V LED	3170/3004	diffuso/diffuse 120° SYM
<b>JED.5953.1 5 Y. Z</b>	1205	28x1.2W/230V LED	3016/2590	stretto/narrow 15° SYM
<b>JED.5953.2 5 Y. Z</b>	1205	28x1.2W/230V LED	3016/2590	largo/wide 30° SYM
<b>JED.5953.3 5 Y. Z</b>	1205	28x1.2W/230V LED	3016/2590	ellittico/ellip.10x45° SYM
<b>JED.5953.4 5 Y. Z</b>	1205	28x1.2W/230V LED	3016/2590	ellittico/ellip. 11x30° SYM

### ACCESSORI / ACCESSORIES



**JED.C24** L.630mm.  
**JED.C54** L.1230mm.  
Cassaforma per incasso.  
Recessed housing.




**AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.



**JED.CD**  
Giunto lineare.  
Linear joint.



**AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.

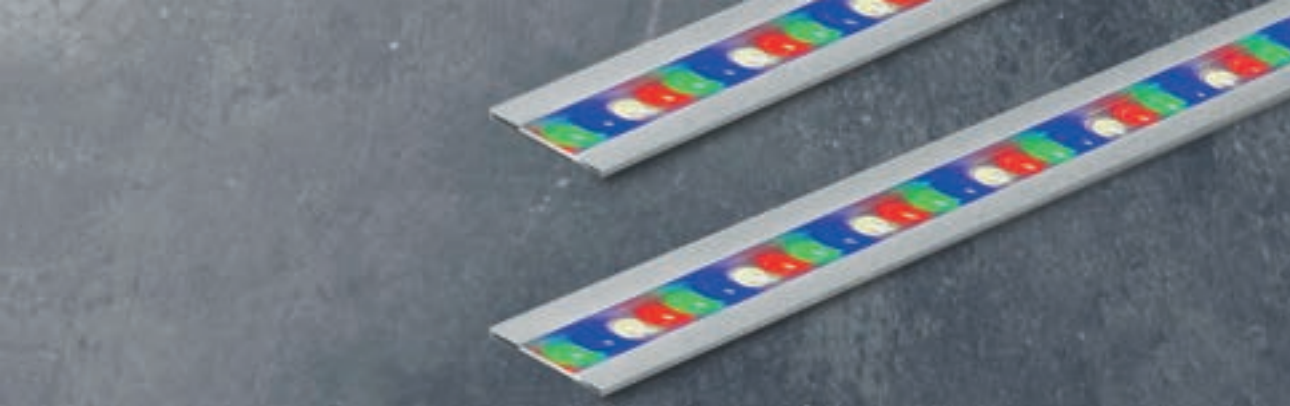


CE	IP67
LED	RG1
Mac Adam 3	50000H
L80 B10	RGBW
⏚	

- 05**- anodizzato/anodised
  - 06**- antracite/anthracite
  - 37**- grigio chiaro opaco/clear matte grey
  - 99**- custom
- Z**  
 COLOR

# C A B R I O

## R E C E S S E D   R G B W



- D.**  
15°  
**1**
- 30°  
**2**
- 10X45°  
**3**

COD. ON/OFF	L.MM	W	DRIVER
<b>JED.5941.D 99. Z</b>	615	24x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included
<b>JED.5942.D 99. Z</b>	915	36x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included
<b>JED.5943.D 99. Z</b>	1215	48x1.2W/230V RGBW	driver-dmx incluso/ driver-dmx included

### ACCESSORI / ACCESSORIES



- JED.C41** L.640mm.
- JED.C42** L.940mm.
- JED.C43** L.1240mm.

Cassaforma per incasso.  
Recessed housing.



- JED.CD**  
Giunto lineare.  
Linear joint.



- AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.



- AAA.TRS127N**  
Centralina di controllo RGBW.  
RGBW control unit.



- AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.