

# CARRABILI DRIVEWAY



Sono gli incassi a terra storici di Civic. Le nuove fonti luminose e la nuova tecnologia produttiva mantengono questa collezione originale e al passo con i tempi. La famiglia è realizzata interamente in acciaio Inox offrendo maggior resistenza e durata nel tempo.

Civic's historic ground recessed range. The new sources and the new production technology, maintains this range up to date. The construction entirely in Stainless steel ensure reliability and quality along the time.



Carrabili



Era  
Diana



Perseo  
Zeus







## ZEUS

Corpo e anello di chiusura in acciaio inox AISI 304. Grado di protezione IP67. Schermo di protezione in vetro trasparente temperato di spessore 12mm con resistenza meccanica IK 10 per passaggio veicolare. Guarnizione in gomma al silicone. Riflettore fisso asimmetrico o orientabile. Equipaggiato con un LED di colore bianco 4000K o 3000K. Potenze da 17W a 24W. Fornito completo di driver integrato nella struttura e di cavo di collegamento H05RN-F 3x1mm<sup>2</sup>.

Structure and closing ring made of AISI 304 stainless steel. IP67 protection degree. Protection shield made of transparent tempered glass with 12mm thickness and IK 10 shock resistance for vehicle passage use. Silicone rubber gasket. Fixed, asymmetric or adjustable reflector. Equipped with one LED in 4000K or 3000K color temperature. Power from 17W up to 24W. Supplied with built-in driver and H05RN-F 3x1mm<sup>2</sup> connecting cable.



## PERSEO

Corpo e anello di chiusura in acciaio inox AISI 304. Grado di protezione IP67. Schermo di protezione in vetro trasparente temperato di spessore 12mm con resistenza meccanica IK 10 per passaggio veicolare. Guarnizione in gomma al silicone. Riflettore fisso asimmetrico o orientabile. Equipaggiato con un LED di colore bianco 4000K o 3000K. Potenza 17W. Fornito completo di driver integrato nella struttura e di cavo di collegamento H05RN-F 3x1mm<sup>2</sup>.

Structure and closing ring made of AISI 304 stainless steel. IP67 protection degree. Protection shield made of transparent tempered glass with 12mm thickness and IK 10 shock resistance for vehicle passage use. Silicone rubber gasket. Fixed, asymmetric or adjustable reflector. Equipped with one LED in 4000K or 3000K color temperature. Power 17W. Supplied with built-in driver and H05RN-F 3x1mm<sup>2</sup> connecting cable.

CE	IP67
LED	RG1
CRI 80/90	Driver on/off incl.
L80 B10	Driveover Carrabile
50000H	Mac Adam 3



# Z E U S

**D.**  
OPTIC  
38° 1

OPTIC  
20° 2

OPTIC  
13° 3


**X.**  
CRI80  
5

CRI90  
6


**Y.**  
4000K  
7

3000K  
8


FISSO / FIXED



ORIENTABILE / ADJUSTABLE



ASIMMETRICO / ASYMMETRIC



**COD. ON/OFF**

**D.MM**

**W**

**LM**

**DRIVER**

FISSO / FIXED

**JEZ.5580. D X Y**

Ø260

24W/230V LED

3710/3550

built-in/incorporato

ORIENTABILE / ADJUSTABLE

**JEZ.5581. D X Y**

Ø260

17W/230V LED

2700/2550

built-in/incorporato

ASIMMETRICO / ASYMMETRIC

**JEZ.5582. 1 X Y**

Ø260

24W/230V LED


3710/3550

built-in/incorporato

## ACCESSORI / ACCESSORIES



**JEZ.FG**  
Vetro sabbato  
Sanded glass.



**JEZ.FR2**  
Cornice quadrata  
Square ring.



**AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.




**AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.




CE	IP67
<b>LED</b>	<b>RG1</b>
CRI 80/90	Driver on/off incl.
L80 B10	Driveover Carrabile
50000H	Mac Adam 3
⏚	

# PERSEO


FISSO / FIXED



ORIENTABILE / ADJUSTABLE



ASIMMETRICO / ASYMMETRIC



**D.**  
OPTIC  
38°  
1

OPTIC  
20°  
2

OPTIC  
13°  
3

**X.**  
CRI80  
5

CRI90  
6

**Y.**  
4000K  
7

3000K  
8

**COD. ON/OFF**

**D.MM**

**W**

**LM**

**DRIVER**

FISSO / FIXED

**JEP.5590. D X Y**      Ø230      17W/230V LED      2700/2550      built-in/incorporato

ORIENTABILE / ADJUSTABLE

**JEP.5591. D X Y**      Ø230      17W/230V LED      2700/2550      built-in/incorporato


ASIMMETRICO / ASYMMETRIC

**JEP.5592. D X Y**      Ø230      17W/230V LED      2700/2550      built-in/incorporato

## ACCESSORI / ACCESSORIES



**JEP.FG**  
Vetro sabbato  
Sanded glass.



**JEP.FR2**  
Cornice quadrata  
Square ring.




**AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.



**AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.



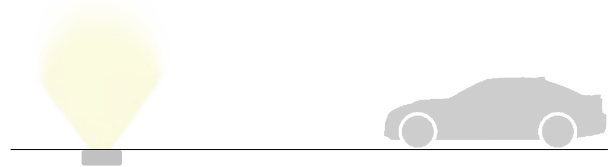

## ERA

Corpo e anello di chiusura in acciaio inox AISI 304. Grado di protezione IP67. Schermo di protezione in vetro trasparente temperato di spessore 10mm con resistenza meccanica IK 10 per passaggio veicolare. Guarnizione in gomma al silicone. Equipaggiato con un LED di colore bianco 4000K o 3000K. Potenza da 13W. Fornito completo di driver integrato nella struttura e di cavo di collegamento H05RN-F 3x1mm<sup>2</sup>.

Structure and closing ring made of AISI 304 stainless steel. IP67 protection degree. Protection shield made of transparent tempered glass with 10mm thickness and IK 10 shock resistance for vehicle passage use. Silicone rubber gasket. Fixed reflector. Equipped with one LED in 4000K or 3000K color temperature. Power 13W. Supplied with built-in driver and H05RN-F 3x1mm<sup>2</sup> connecting cable.



## DIANA



Corpo e anello di chiusura in acciaio inox AISI 304. Grado di protezione IP67. Schermo di protezione in vetro trasparente temperato di spessore 10mm con resistenza meccanica IK 10 per passaggio veicolare. Guarnizione in gomma al silicone. Ottica fissa o orientabile. Equipaggiato con LED di colore bianco da 4000K o 3000K con potenza 9W o con portalampada GU10 o RGB 6W, fornito completo di driver integrato nella struttura e di cavo di collegamento H05RN-F 3x1mm<sup>2</sup>. Disponibile anche nella versione RGB con potenza 6W.

Structure and closing ring made of AISI 304 stainless steel. IP67 protection degree. Protection shield made of transparent tempered glass with 10mm thickness and IK 10 shock resistance for vehicle passage use. Silicone rubber gasket. Fixed or adjustable optic. Equipped with one LED in 4000K or 3000K color temperature power 9W or with GU10 lampholder or 6W RGBc, supplied with built-in driver and H05RN-F 3x1mm<sup>2</sup> connecting cable. Also available in RGB version power 6W.



CE	IP67
LED	RG1
CRI 80/90	Driver on/off incl.
L80 B10	Driveover Carrabile
50000H	Mac Adam 3
⏚	



# ERA

**D.**  
OPTIC  
45° 1

OPTIC  
24° 2

OPTIC  
10° 3


**X.**  
CRI80  
5

CRI90  
6

**Y.**  
4000K  
7

3000K  
8

FISSO / FIXED




COD. ON/OFF	D.MM	W	LM	DRIVER
		FISSO / FIXED		
<b>JEL.5540. D X Y</b>	Ø178	13W/230V LED	2100/2000	built-in/incorporato

## ACCESSORI / ACCESSORIES



**JEL.FG**  
Vetro sabbato  
Sanded glass.



**JEL.FR2**  
Cornice quadrata  
Square ring.



**AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.






**AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.



CE	IP67
<b>LED</b>	<b>RG1</b>
CRI 80/90	Driver on/off incl.
L80 B10	Driveover Carrabile
50000H	Mac Adam 3

# DIANA



D.  
OPTIC  
36° 1

OPTIC  
24° 2

OPTIC  
12° 3

X.  
CRI80 5

CRI90 6

Y.  
4000K 7

3000K 8

2700K 9

COD. ON/OFF	D.MM	W	LM	DRIVER	
FISSO / FIXED					
JEO.5502. D X Y	Ø110	9W/230V LED	890/840/770	built-in/incorporato	
JEO.35FGUB	Ø110	20W/230V GU10 lamp. esclusa/lamp excluded			
ORIENTABILE / ADJUSTABLE					
JEO.5503. D X Y	Ø110	9W/230V LED	890/840/770	built-in/incorporato	
JEO.35MGUB	Ø110	20W/230V GU10 lamp. esclusa/lamp excluded			
COD. ON/OFF	D.MM	W	LM	FASCIO / BEAM	DRIVER
FISSO / FIXED — <b>RGB</b>					
JEO.5502.299	Ø110	6W/24V LED RGB	420	25°	excluded/escluso


## ACCESSORI / ACCESSORIES



**JEO.C1**  
Calottina a 1 finestra.  
1 window dome.



**JEO.FG**  
Vetro sabbaiato  
Sanded glass.



**JEO.FR2**  
Cornice quadrata  
Square ring.



**JEO.MS**  
Master JEO RGB.



**JEO.SL**  
Slave JEO RGB.



**AAA.CN3**  
Connettore IP68, 3vie.  
IP68 waterproof connector, 3way.



**AAA.CN4**  
Connettore IP68, 4vie.  
IP68 waterproof connector, 4way.