


SHADOW



Profilo dalle linee sobrie e discrete, è adatto ad illuminare uffici ed ambienti di lavoro. Nella versione a luce diretta ed indiretta è la soluzione ideale per creare un ambiente accogliente dai toni più morbidi e sfumati.

Profile with sober and discreet lines, it is suitable for lighting offices and work environments. In the direct and indirect light version, it is the ideal solution to create a welcoming environment with softer tones.

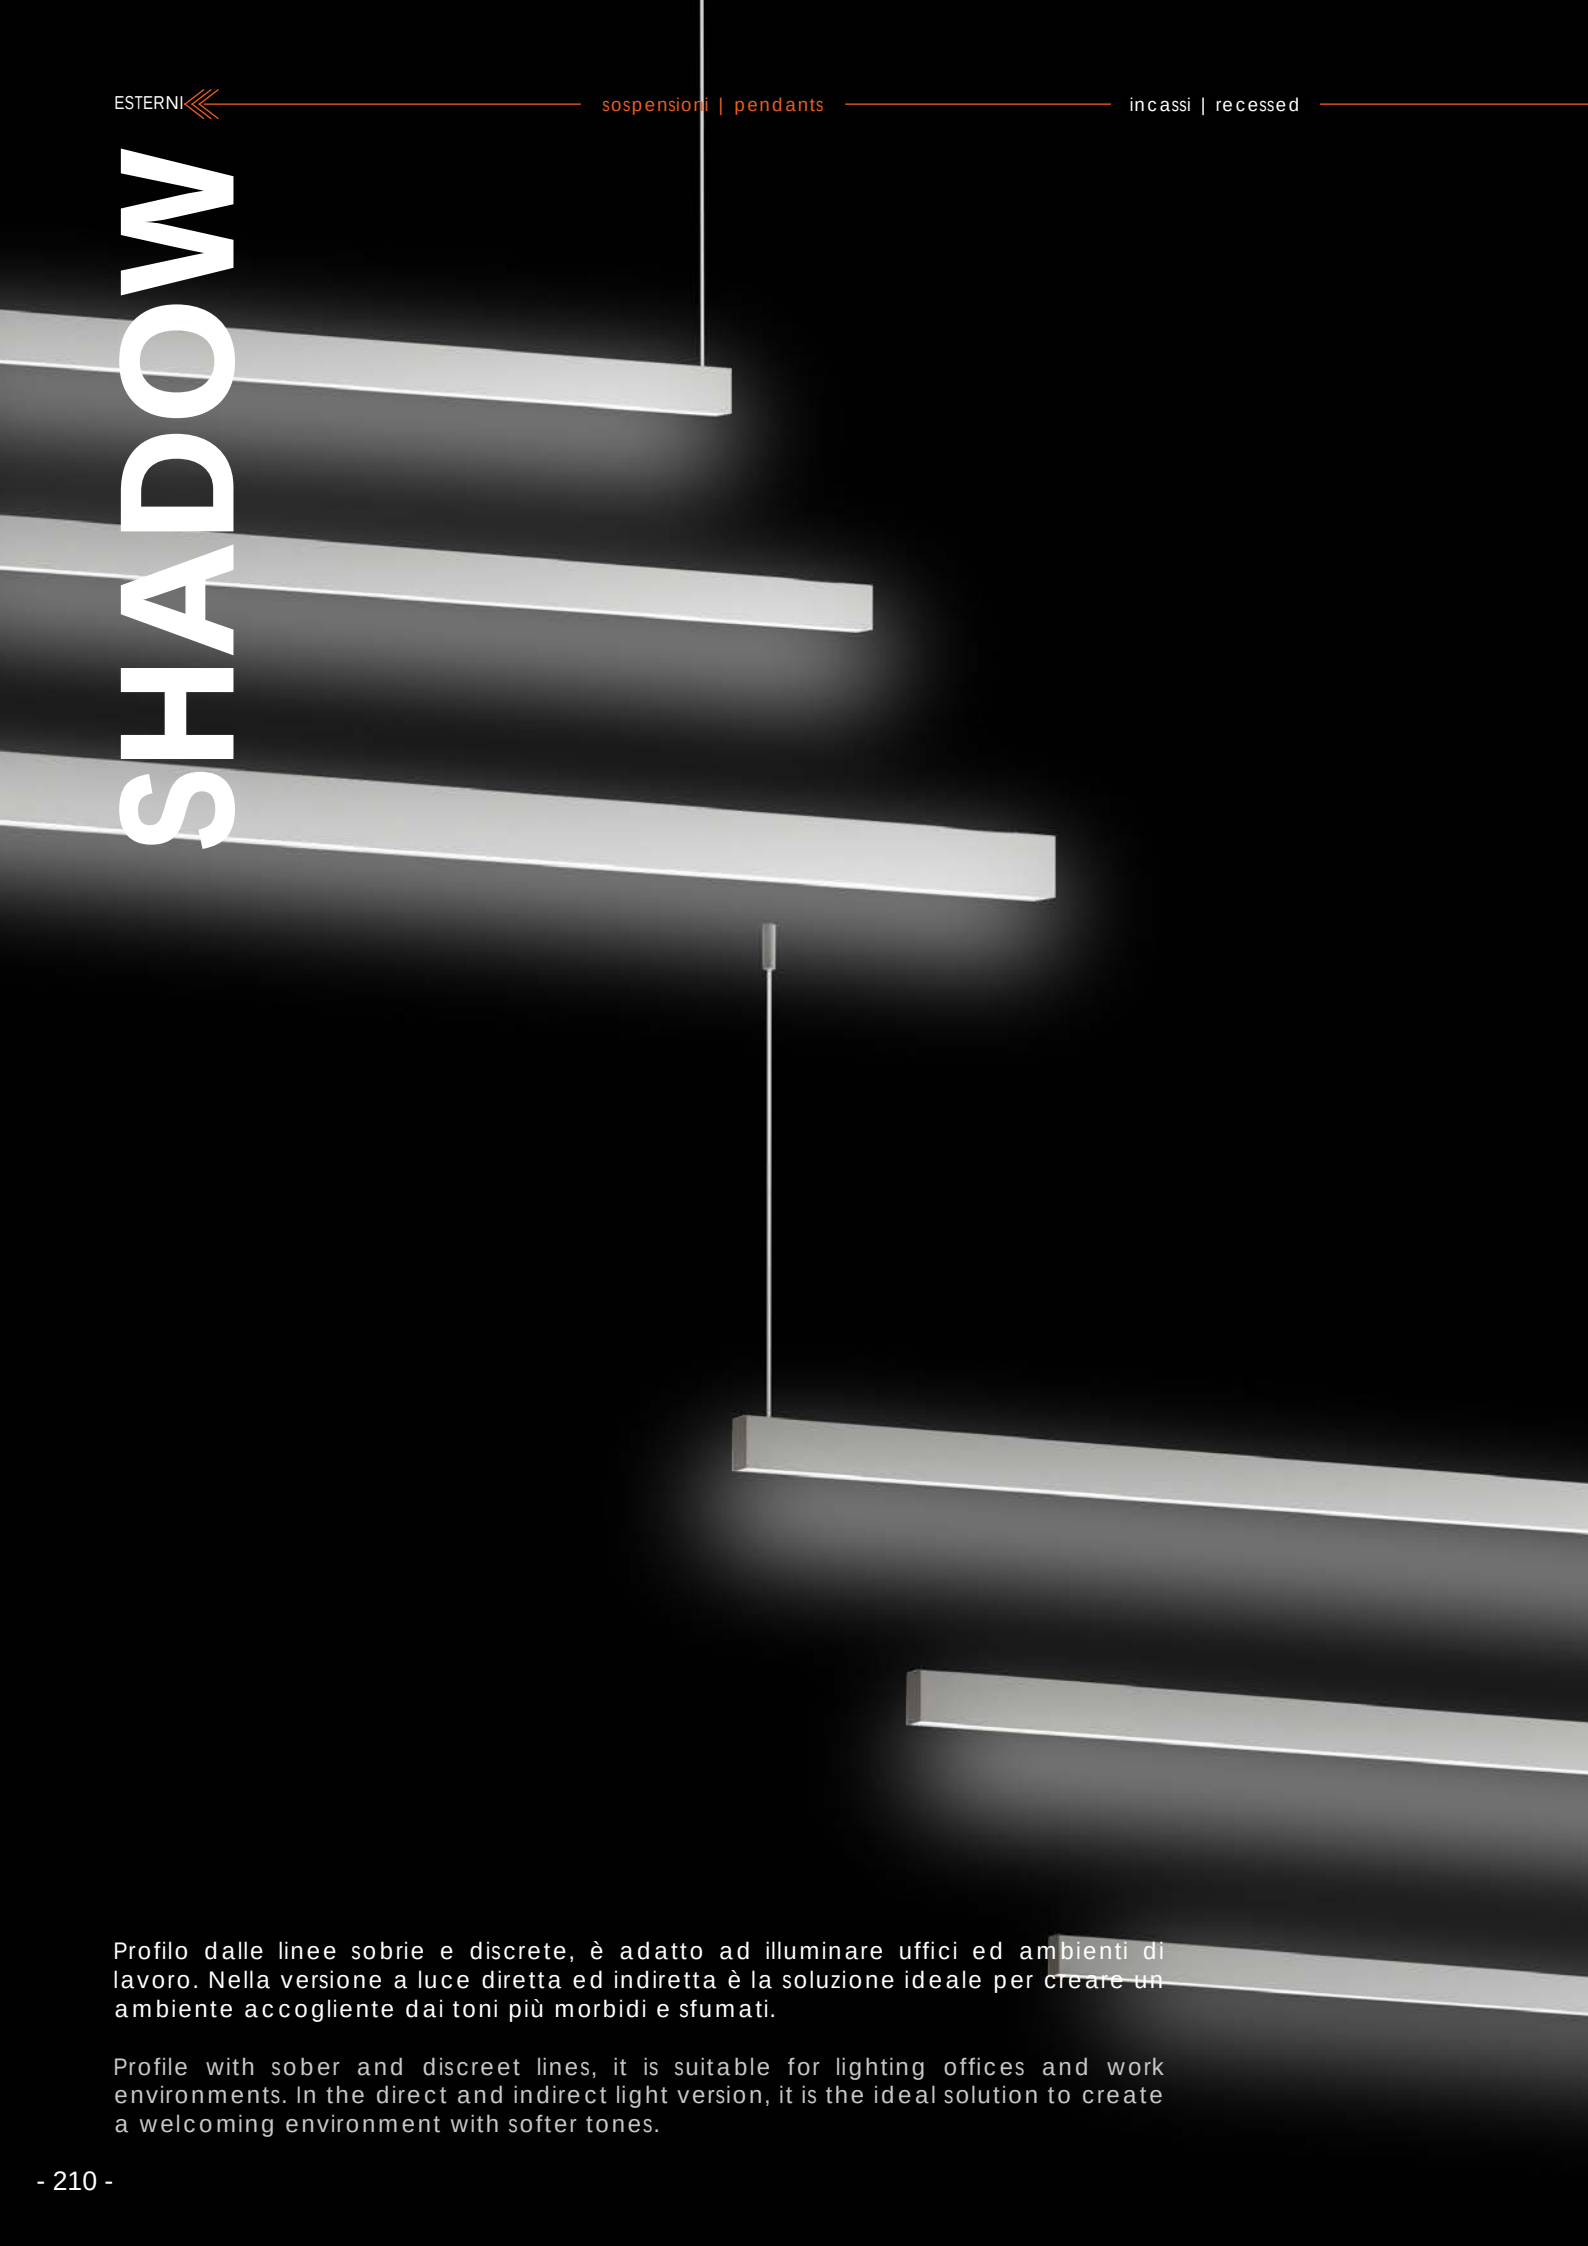

SHADOW

Sistema modulare in alluminio estruso da plafone o sospensione. Driver ON/OFF o dimmerabile incluso. Diffusore opale o microprismato incluso. Accessori da ordinare separatamente.

Modular system in extruded aluminium for ceiling or suspended installation. ON/OFF or dimmable driver included. Opal or microprismatic diffuser included. Accessories to be ordered separately.

CE	LED
IP20	
RG0	Driver on/off incl.
L80 B10	50000H
CRI 80/90	



SHADOW

Z.
COLOR

bianco/white - **02** 
nero/black - **03** 
custom - **99** 

D.
OPALE
OPAL
0

MICROPRISM.
9

X.
CRI80
5

CRI90
6

Y.
5000K
6




4000K
7

3000K
8

2700K
9

DIM

A2

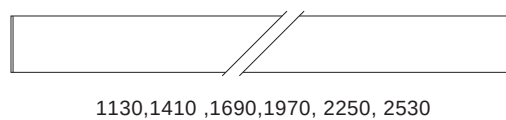

COD. ON/OFF

L.MM

W

LM

DIRETTA/DIRECT

LSA.4753. D X Y. Z	1130	28W/230V LED	3920/3820/3620/3560
LSA.4754. D X Y. Z	1410	35W/230V LED	4910/4780/4540/4468
LSA.4755. D X Y. Z	1690	42W/230V LED	5880/5730/5430/5340
LSA.4756. D X Y. Z	1970	49W/230V LED	6870/6690/6350/6248
LSA.4757. D X Y. Z	2250	56W/230V LED	7840/7640/7240/7120
LSA.4758. D X Y. Z	2530	63W/230V LED	8830/8600/8160/8028

DIRETTA + INDIRETTA/DIRECT + INDIRECT

LSA.4853. D X Y. Z	1130	42W/230V LED	5880/5730/5430/5340
LSA.4854. D X Y. Z	1410	49W/230V LED	6870/6690/6350/6248
LSA.4855. D X Y. Z	1690	63W/230V LED	8830/8600/8160/8028
LSA.4856. D X Y. Z	1970	77W/230V LED	10860/10790/10510/10426
LSA.4857. D X Y. Z	2250	84W/230V LED	11760/11460/11320/11278
LSA.4858. D X Y. Z	2530	91W/230V LED	12750/12420/11780/11588

ACCESSORI / ACCESSORIES



AAA.RA2
Rosone alimentato basic.
Power supply basic.



LSA.DP
Attacco a plafone (coppia).
Ceiling bracket (pair).



LSA.SO
Sospensioni L.1700mm (coppia).
Suspension kit L.1700mm (pair).



LSA.TE
Testata di chiusura.
End cap.



LSA.CD
Giunto lineare.
Linear joint.

