




Nuovo prodotto per esterni, amplia la collezione di paletti in casa CIVIC. Pensato per illuminare giardini ed esterni residenziali di ogni tipo grazie alla sua luce uniforme direzionata verso il basso. Viene proposto con due varianti per lo stelo e in tre possibili altezze.

New product for outdoor, it expand the poles collection in CIVIC's house. Thought for enlight gardens and residential external of any kind thanks to its uniform and downward light distribution. It is proposed with two tipology of stems and three differnt heighs.



MICRO TEBE

Testa in acciaio inox con verniciatura doppio strato. Steli in polycarbonato o acciaio inox verniciato. Schermo in polycarbonato opale. Guarnizione in gomma di silicone. Equipaggiato con LED 4000K, 3000K o 2700K. Potenza 5W. Proposto in due soluzioni, a 230V o 24V. Grado di protezione IP65. Rischio fotobiologico RG0. Cavo di collegamento H05RN-F.

Head made of stainless steel with double layer coating. Stems in polycarbonate or stainless stell coated. Opal polycarbonate diffuser. Silicone rubber gasket. Equipped with white LED 4000K, 3000K o 2700K. Power 5W. Available in 230 V or 24 V. IP65 protection degree. Photobiological risk RG0. Supplied complete with H05RN-F connection cable.



Stelo in Polycarbonato
Polycarbonate pole

Stelo in acciaio
steel pole

CE	IP65
LED	RG0
CRI 80	IK08
L80 B10	Mac Adam 3
50000H	230V
	24V



MICRO TEBE

CRI80
5

Y.
4000K
7



3000K
8

2700K
9

D. POLE
OPALE
1

TRASPA-
RENTE
2

NERO
3

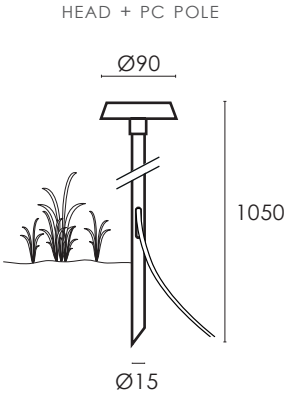

- Z. COLOR**
- grigio antracite / anthracite grey - **06**
 - bianco raggrinzante / rough white - **32**
 - grigio chiaro opaco / clear matte grey - **37**
 - corten / corten - **39**
 - verde salvia / sage - **53**
 - giallo / yellow - **54**

COD.ON/OFF	H.MM	W	LM	STELO/POLE
HEAD + PC POLE				
MTY.7250.D 5 Y. Z	1050	5W/230V LED	615/615/523	opal / transparent / black
MTY.7254.D 5 Y. Z	1050	5W/24V LED	615/615/523	opal / transparent / black
HEAD				
MTY.7223.0 5 Y. Z	40	5W/230V LED	615/615/523	excluded
MTY.7224.0 5 Y. Z	40	5W/24V LED	615/615/523	excluded

ACCESSORI / ACCESSORIES



MTY.ST.029.Z
Stelo inox verniciato H 290 mm.
Painted stainless steel pole H 290 mm.



MTY.CM
Cassaforma mini/micro tebe.
Mini/micro tebe recessed box.



MTY.ST.084.Z
Stelo inox verniciato H 840 mm.
Painted stainless steel pole H 840 mm.



AAA.CN2
Connettore IP68, 2 vie.
IP68 waterproof connector, 2 ways.



MTY.ST.115.Z
Stelo inox verniciato H 1150 mm.
Painted stainless steel pole H 1150 mm.



AAA.TRSLO8
Driver 30 W, IP20, per soluzione a 24V
Driver 30 W, IP20, for the 24V solution.



LAA.SP
Picchetto inox.
Stainless steel picket.



AAA.TRS13
Driver 70 W, IP67 per soluzione a 24V
Driver 70 W, IP67 for the 24V solution.

