


MINI TEBE



Versione intermedia della collezione di paletti per esterno CIVIC. Progettato per illuminare verso il basso con una distribuzione uniforme della luce, MINI TEBE è la soluzione perfetta per dar maggior risalto a piante e giardini. MINI TEBE viene proposto con due tipologie di materiali per lo stelo e in tre diverse altezze.

Middle version of CIVIC'S poles collection for outdoor areas. Designed to shine downwards with an uniform light distribution, MINI TEBE is the perfect solution for highlight plants and gardens. MINI TEBE is proposed with two typology of stems and three different heights.



MINI TEBE

Testa in acciaio inox con verniciatura doppio strato. Steli in policarbonato o acciaio inox verniciato. Schermo in policarbonato opale. Guarnizione in gomma di silicone. Equipaggiato con LED 4000K, 3000K o 2700K. Potenza 10W. Proposto in due soluzioni, a 230V o 24V. Grado di protezione IP65. Rischio fotobiologico RG0. Cavo di collegamento H05RN-F.


Head made of stainless steel with double layer coating. Stems in polycarbonate or stainless steel coated. Opal polycarbonate diffuser. Silicone rubber gasket. Equipped with white LED 4000K, 3000K or 2700K. Power 5W. Available in 230 V or 24 V. IP65 protection degree. Photobiological risk RG0. Supplied complete with H05RN-F connection cable.



Stelo in Policarbonato
Polycarbonate pole

Stelo in acciaio
steel pole

CE	IP65
LED	RG0
CRI 80	IK08
L80 B10	Mac Adam 3
50000H	230V
	24V

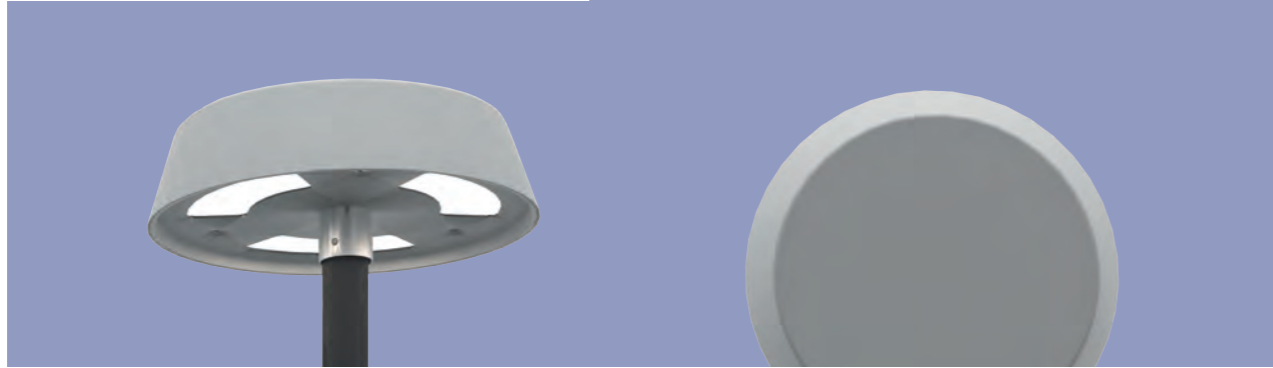

MINI TEBE

CR180
5

Y.
4000K
7


3000K
8

2700K
9


D. POLE
OPALE
1

TRASPARENTE
2

NERO
3

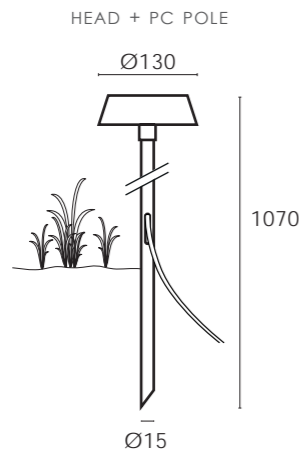

Z. COLOR	
grigio antracite / anthracite grey	06
bianco raggrinzante / rough white	32
grigio chiaro opaco / clear matte grey	37
corten / corten	39
verde salvia / sage	53
giallo / yellow	54

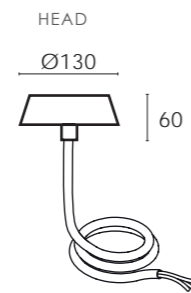

COD.ON/OFF	H.MM	W	LM	STELO/POLE
HEAD + PC POLE				
MTY.7170.D 5 Y. Z	1070	10W/230V LED	1168/1168/993	opal / transparent / black
MTY.7174.D 5 Y. Z	1070	10W/24V LED	1168/1168/993	opal / transparent / black
HEAD				
MTY.7123.0 5 Y. Z	60	10W/230V LED	1168/1168/993	excluded
MTY.7124.0 5 Y. Z	60	10W/24V LED	1168/1168/993	excluded

ACCESSORI / ACCESSORIES



MTY.ST.029.Z
Stelo inox verniciato H 290 mm.
Painted stainless steel pole H 290 mm.



MTY.CM
Cassaforma mini/micro tebe.
Mini/micro tebe recessed box.



MTY.ST.084.Z
Stelo inox verniciato H 840 mm.
Painted stainless steel pole H 840 mm.



AAA.CN2
Connettore IP68, 2 vie.
IP68 waterproof connector, 2 ways.



MTY.ST.115.Z
Stelo inox verniciato H 1150 mm.
Painted stainless steel pole H 1150 mm.



AAA.TRSL08
Driver 30 W, IP20, per soluzione a 24V
Driver 30 W, IP20, for the 24V solution.



LAA.SP
Picchetto inox.
Stainless steel picket.



AAA.TRSL13
Driver 70 W, IP67 per soluzione a 24V
Driver 70 W, IP67. for the 24V solution.

