


MINÙ-R



Minù-R è una collezione di anelli decorativi luminosi a luce diretta o a luce interna. Il design elegante e leggero è di grande impatto scenico ed è ideale per uffici, contesti residenziali e commerciali.

Minù-R is a collection of decorative lighting rings with direct or internal light. It can offer such elegant and light design, with great scenic impact; it is the ideal choice for offices, residential and commercial environments.

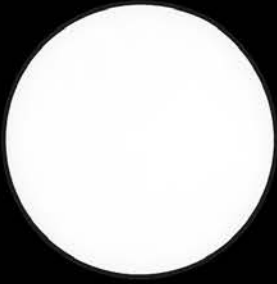

Diffuser




Square




Perimeter



Lap

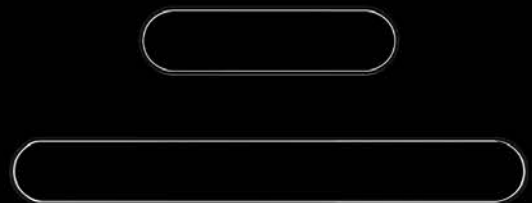




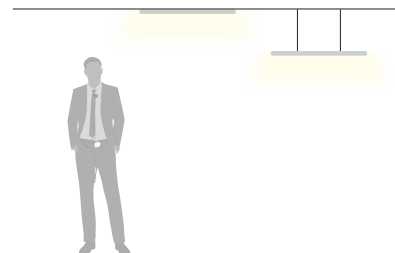

MINÙ-R DIFFUSER

Profilo realizzato in lega di alluminio estruso curvato e verniciato a polveri con schermo di protezione in policarbonato. Tono bianco 4000K, 3000K o 2700K. Potenze da 60W/560mm a 198W/1120mm. Accessori per la sospensione da ordinare separatamente. Alimentatore on-off o dimmerabile incluso.

Structure in powder coated curved extrusion of aluminium alloy with opal diffuser. 4000K, 3000K or 2700K white light tone. Powers from 60W/560mm up to 198W/1120mm. Suspension kit to be ordered separately. On-Off or dimmable driver included.

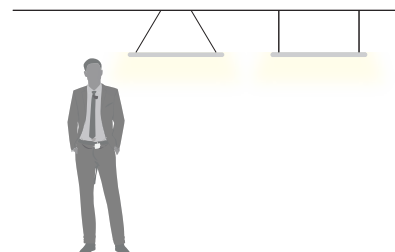

MINÙ-R PERIMETER

Profilo realizzato in lega di alluminio estruso curvato e verniciato a polveri con schermo di protezione in policarbonato. Tono bianco 4000K, 3000K o 2700K. Potenze da 34W/560mm a 90W/1480mm. Accessori per la sospensione da ordinare separatamente. Alimentatore on-off o dimmerabile incluso nel rosone.

Structure in powder coated curved extrusion of aluminium alloy with opal diffuser. 4000K, 3000K or 2700K white light tone. Powers from 34W/560mm up to 90W/1480mm. Suspension kit to be ordered separately. On-Off or dimmable driver included in the ceiling cup.

CE	LED
⚡	IP40
RGD	Driver on/off incl.
L80 B10	50000H
CRI 80/90	




MINÙ-R

DIFFUSER

Z.
COLOR



- bianco raggrinzante/rough white - 32
- nero raggrinzante/rough black - 33
- custom - 99

D.
OPALE
OPAL
1



Ø560, Ø840, Ø1120

X.
CRI80
5

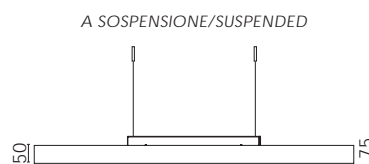

CRI90
6

COD. ON/OFF

D.MM

W

LM

Y.
4000K
7

MNU.5625. 1 X Y. Z

560

60W/230V LED

8500/8300/8240

MNU.5626. 1 X Y. Z

840

124W/230V LED

17000/16600/16480

MNU.5627. 1 X Y. Z

1120

198W/230V LED

27300/27000/26910

3000K
8

2700K
9

DIM
A2

ACCESSORI / ACCESSORIES



MNU.SD1
Kit di sospensione L.2000mm.
Suspension kit L.2000mm.




CE	LED
III	IP40
RG0	Driver escl./excl.
L80 B10	50000H
CRI 80/90	

- 32 - bianco raggrinzante/rough white
- 33 - nero raggrinzante/rough black
- 99 - custom


Z.
COLOR

MINÙ-R

PERIMETER



Ø560, Ø840, Ø1120, Ø1480

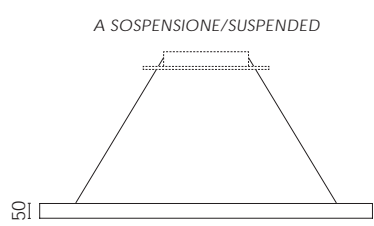

A SOSPENSIONE/SUSPENDED

- OPALE OPAL 1
- X. CRI80 5
- CRI90 6
- Y. 4000K 7
- 3000K 8
- 2700K 9
- DIM A2

COD. ON/OFF	D.MM	W	LM
MNU.5635. 1 X Y. Z	560	34W/24V LED	3010/2630/2516
MNU.5636. 1 X Y. Z	840	51W/24V LED	4520/3950/3780
MNU.5637. 1 X Y. Z	1120	67W/24V LED	6020/5270/5045
MNU.5638. 1 X Y. Z	1480	90W/24V LED	9460/9100/8990

ACCESSORI / ACCESSORIES



MNU.SP1
Kit di sospensione L.2000mm e driver 50W.
Suspension kit L.2000mm and driver 50W.



MNU.SP3
Kit di sospensione L.2000mm e driver 110W.
Suspension kit L.2000mm and driver 110W.