



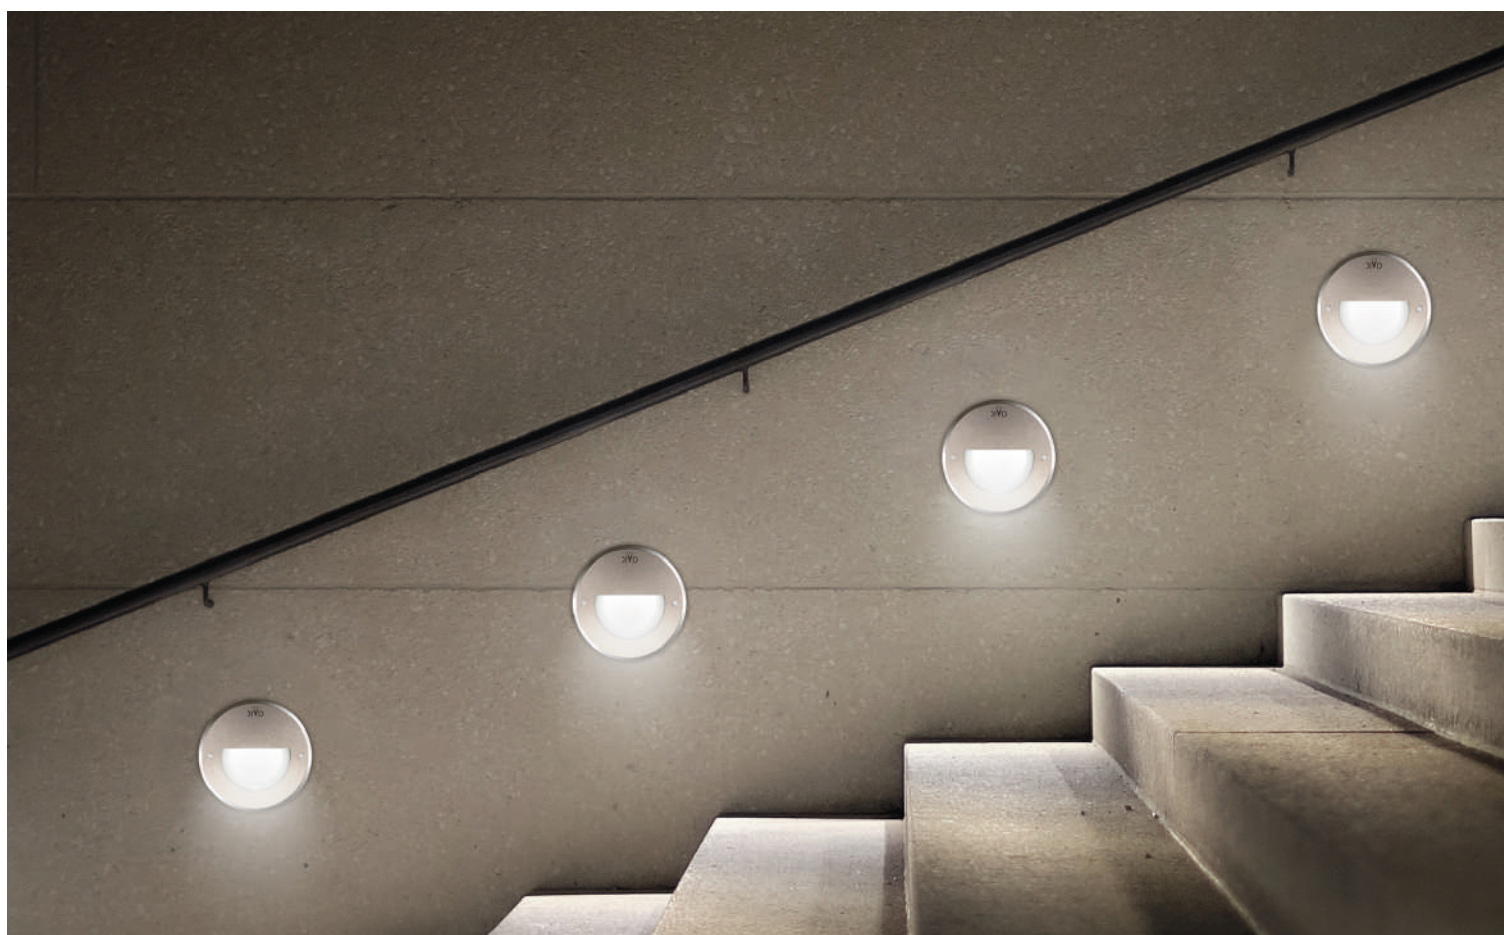

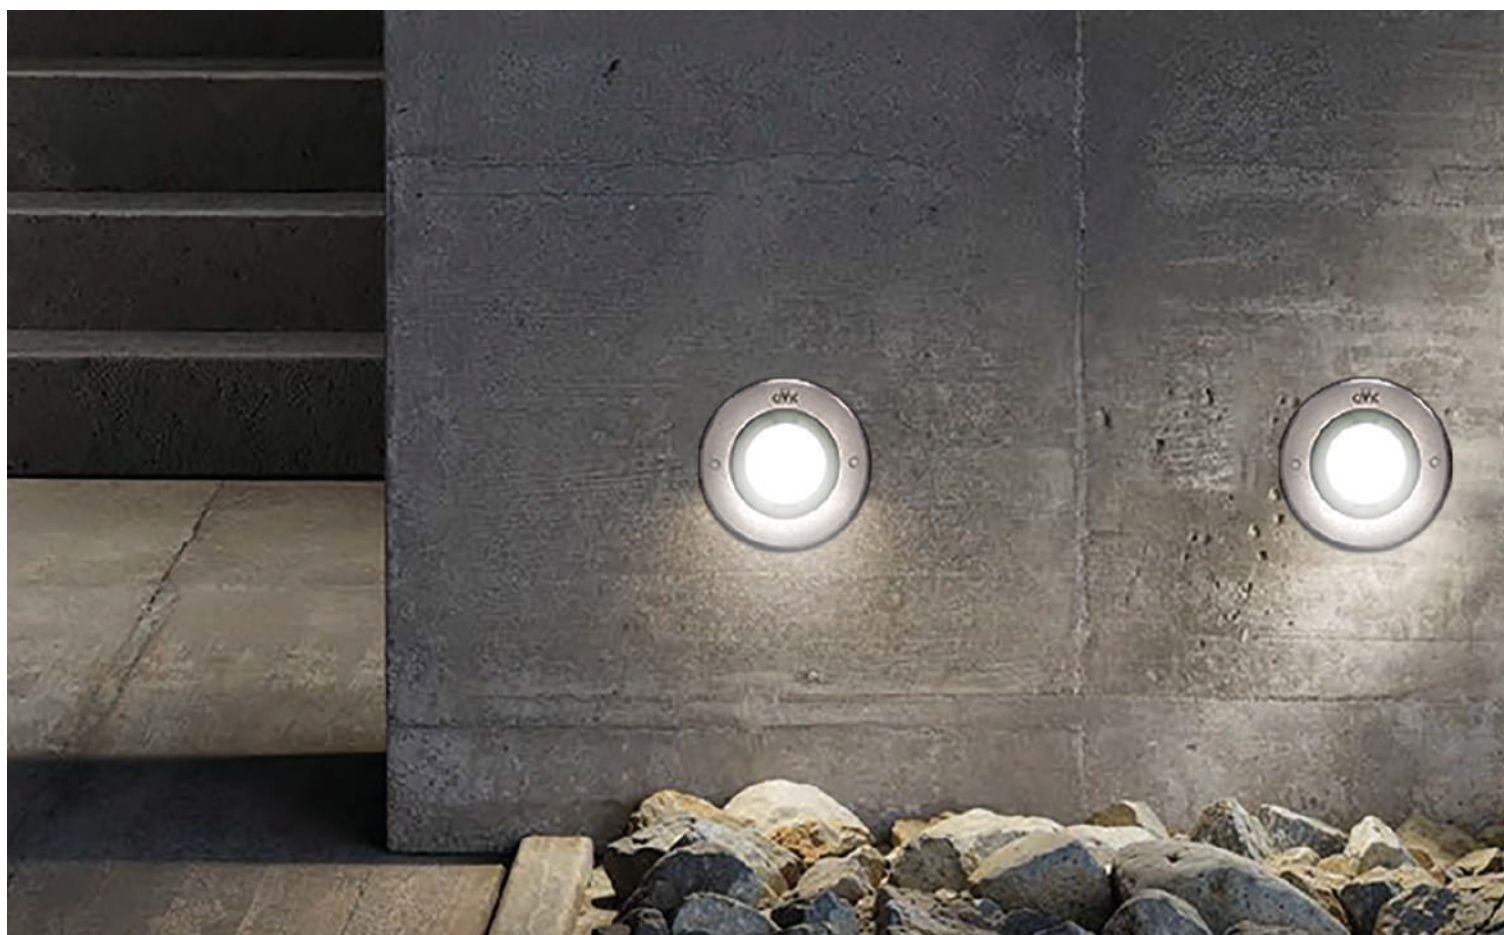

ENEA

Corpo e anello di chiusura in acciaio inox. Grado di protezione IP67. Schermo di protezione in vetro sabbato temperato di spessore 10mm con resistenza meccanica IK10. Guarnizione in gomma al silicone. Equipaggiato con LED di colore bianco 4000K, 3000K o 2700K. Potenza 7W. Proposto in due soluzioni, a 230V o 24V. Fornito completo di cavo di collegamento H05RN-F 3x1mm².

Structure and closing ring made of stainless steel. IP67 protection degree. Protection shield made of sanded tempered glass with 10mm thickness and IK10. Silicone rubber gasket. Equipped with one LED in 4000K, 3000K or 2700K white light tone. Power 7W. Available in 230V or 24V. Supplied with H05RN-F 3x1mm² connecting cable.



ERMES

Corpo e visiera in acciaio inox. Grado di protezione IP67. Schermo di protezione in vetro sabbato temperato di spessore 10mm con resistenza meccanica IK10. Guarnizione in gomma al silicone. Equipaggiato con LED di colore bianco 4000K, 3000K o 2700K. Potenza 7W. Proposto in due soluzioni, a 230V o 24V. Fornito completo di cavo di collegamento H05RN-F 3x1mm².



Structure and visor made of stainless steel. IP67 protection degree. Protection shield made of sanded tempered glass with 10mm thickness and IK10. Silicone rubber gasket. Equipped with one LED in 4000K, 3000K or 2700K white light tone. Power 7W. Available in 230V or 24V. Supplied with H05RN-F 3x1mm² connecting cable.



CE	LED
	IP67
RG0	Recessed box incl.
L80 B10	50000H
CRI 90	IK10



ENEA

CRI90				
6				
Y.				
4000K				
7				
3000K				
8				
2700K				
9				
				
		W	LM	
	COD. ON/OFF			DRIVER
	MTD.3502. 1 6 Y	7W/230V LED	890/793/764	incorporato/built-in
				
	MTD.3504. 1 6 Y	7W/24V LED	890/793/764	escluso/excluded

ACCESSORI / ACCESSORIES



AAA.TRS108
LED Driver IP20 30W 24V.




AAA.TRS113
LED Driver IP67 70W 24V.



AAA.CN2
Connettore IP68, 2 vie.
IP68 waterproof connector, 2 way.



AAA.CN3
Connettore IP68, 3 vie.
IP68 waterproof connector, 3 way.




AAA.CN4
Connettore IP68, 4 vie.
IP68 waterproof connector, 4 way.



CE	LED
 230V 24V	IP67
RG0	Recessed box incl.
L80 B10	50000H
CRI 90	IK10

ERMES

			
COD. ON/OFF	W	LM	DRIVER
MTD.3512. 1 6 Y	7W/230V LED	890/793/764	incorporato/built-in
			
MTD.3514. 1 6 Y	7W/24V LED	890/793/764	escluso/excluded

CRI90	6
Y.	
4000K	7
3000K	8
2700K	9

ACCESSORI / ACCESSORIES



AAA.TRS108
LED Driver IP20 30W 24V.



AAA.TRS113
LED Driver IP67 70W 24V.



AAA.CN2
Connettore IP68, 2 vie.
IP68 waterproof connector, 2 way.



AAA.CN3
Connettore IP68, 3 vie.
IP68 waterproof connector, 3 way.



AAA.CN4
Connettore IP68, 4 vie.
IP68 waterproof connector, 4 way.