



APOLLO XS PROIETTORE

La famiglia Apollo diventa "più piccola" con la nuova versione XS. Prestazioni e semplicità sono le caratteristiche principali della Collezione Apollo che ora, grazie alle dimensioni compatte di Apollo XS, è diventata ancora più versatile. Apparecchio adatto a diversi ambienti, dagli spazi domestici ai grandi spazi architettonici, ideale per illuminare pareti e percorsi esterni

The Apollo family becomes "smaller" with the new XS version. Performance and simplicity are the main characteristics of Apollo Collection that now, thanks to the compact dimensions of Apollo XS, has become even more versatile. Luminaire suitable for different environments, from domestic to large architectural spaces, ideal for lighting outdoor walls and paths.

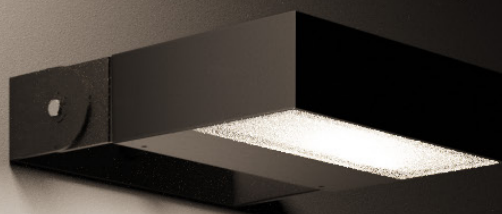


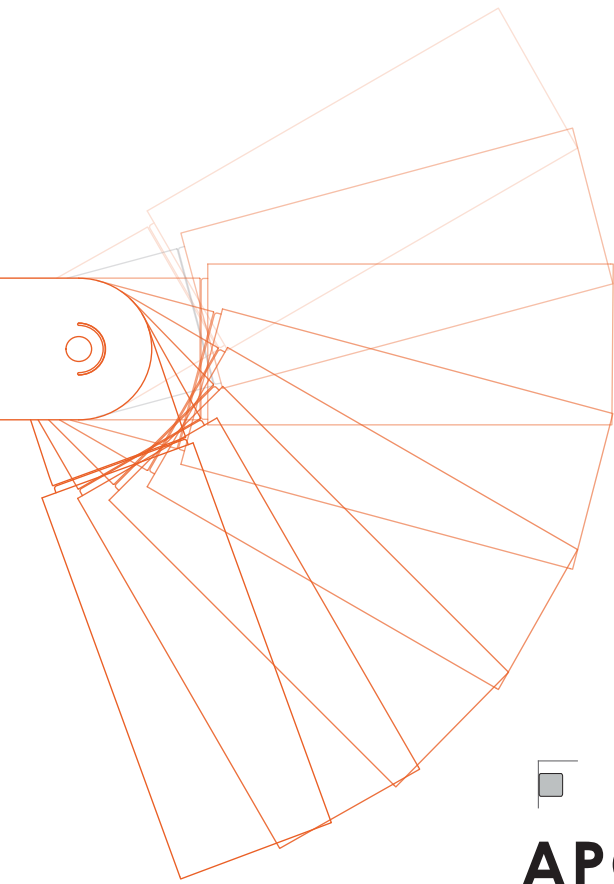


APOLLO XS PROIETTORE

Proiettore orientabile con struttura in fusione di alluminio, staffa in acciaio inox. Verniciatura a polveri epossipoliestere. Vetro temperato sabbato. LED Tono luce bianco 4000K o 3000K. Potenza 6W/230V.

Adjustable projector with the structure in die cast aluminium, Stainless steel bracket. Epoxy powder coating. Sanded tempered glass. LED 4000K or 3000K white light tone. Power 6W/230V.

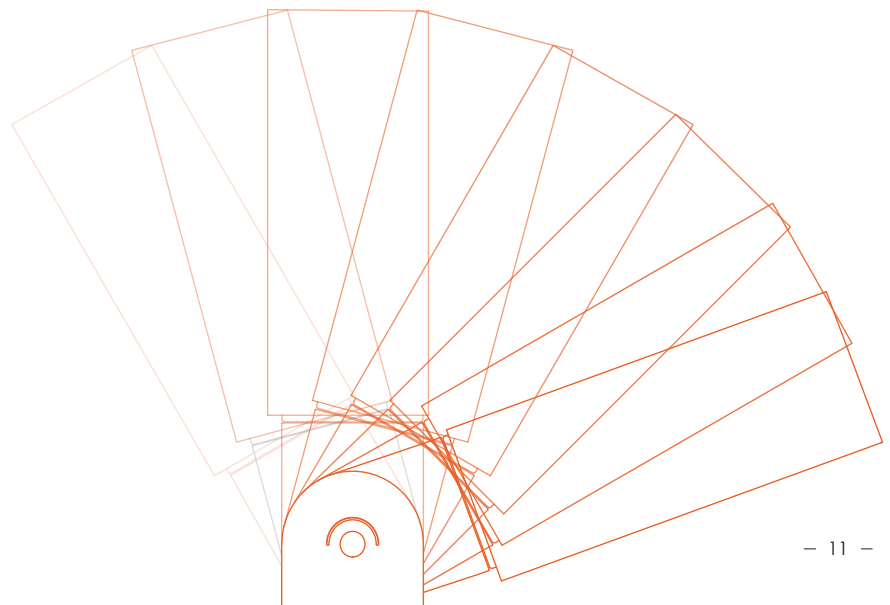

CE	IP65
LED	RG1
CRI 80	Mac Adam 3
L80 B10	
50000H	Driver on/off incl.

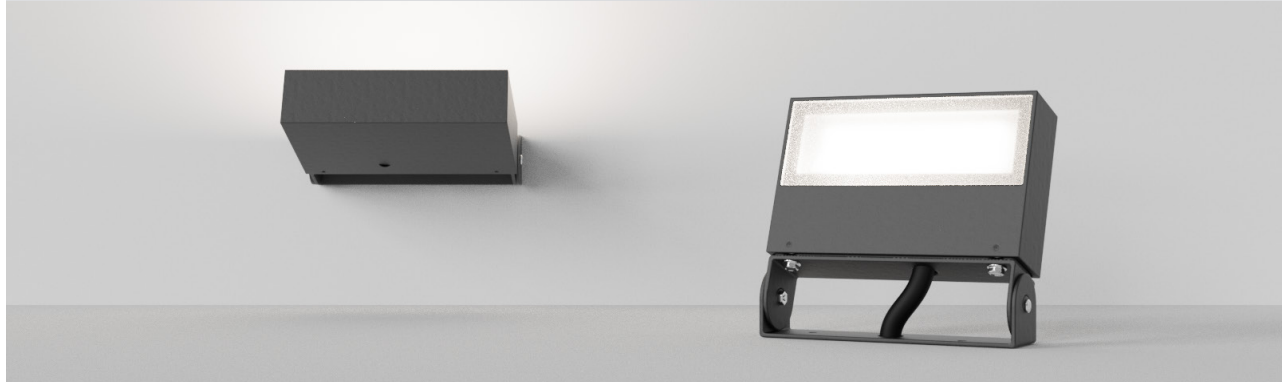

APOLLO XS


PROIETTORE

D.
SABBIATO
SANDED 1

CR180
5

Y.
4000K
7

3000K
8

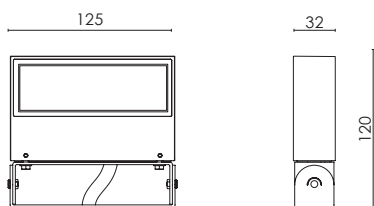

Z.
COLOR

- Antracite / Anthracite - 06
- Bianco ragg. / Rough white - 32
- Nero ragg. / Rough black - 33
- Grigio chiaro / Clear grey - 37
- Custom - 99

COD. ON/OFF	W	LM	EMISSIONE/EMISSION
MTA.5497. D 5 Y. Z	6W/230V LED	720/680	diretta/direct

ACCESSORI / ACCESSORIES



MTA.SP
Picchetto Inox.
Inox Spike.



AAA.CN2
Connettore IP68, 2 vie.
IP68 waterproof connector, 2 way.



AAA.CN3
Connettore IP68, 3 vie.
IP68 waterproof connector, 3 way.



AAA.CN4
Connettore IP68, 4 vie.
IP68 waterproof connector, 4 way.

