


ALU PROOF

Profilo dal design semplice e curato, ideale per tutte le installazioni. Adatto ad ambienti esterni ad elevato utilizzo. Può essere usato singolarmente o a file continue.

Profile with a simple and refined design, ideal for all installations. Suitable for outdoor and high-use environments. It can be used individually or in continuous rows.

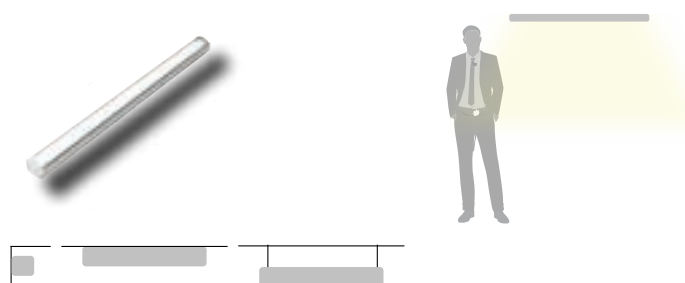

ALU PROOF

Alu si caratterizza per la sua estetica semplice adatta a tutti gli spazi di servizio e grazie alla tripla protezione, si installa in qualsiasi contesto, indoor e outdoor.

Il sistema Tri-proof LED della plafoniera ALU la rende tre volte resistente: all'acqua, alla polvere e agli shock. Perfetto per tutti gli spazi ad elevata intensità di utilizzo e condizioni di ambienti variabili, come cantine, negozi, garage, pensiline, ecc.

Profilo in alluminio, con diffusore in policarbonato acidato.

Installabile singolarmente o in file continue.

Alu is characterized by its simple aesthetics, suitable for all service spaces and thanks to the triple protection, it can be installed in any context, indoor and outdoor.

The Tri-proof LED system of the ALU ceiling light makes it three times resistant: to water, dust and shocks. Perfect for all spaces with high intensity of use and conditions of variable environments, such as cellars, shops, garages, shelters, etc.

Aluminum profile, with acid-etched polycarbonate diffuser.

Can be installed individually or in continuous rows.

CE	IP65
LED	RG1
CRI 80/90	Driver on/off incl.
L80 B10	Alu Body
50000H	Mac Adam 3
⏚	




ALU PROOF

HIGH LUMINANCE


Z. anodizzato / anodised -05

COLOR

SINGLE INSTALLATION



CONTINUOUS INSTALLATION



X.
CRI80
5

CRI90
6

Y.
4000K
7

3000K
8

DIM
1-10V
A1


DALI
A2

COD. ON/OFF	L.MM	W	LM	DIFFUSORE/ DIFFUSER
SINGLE INSTALLATION				
NEF.5661. 0 X Y. Z	597	28W/230V LED	3938/3820lm	acidato/frosted
NEF.5662. 0 X Y. Z	877	42W/230V LED	5918/5740lm	acidato/frosted
NEF.5663. 0 X Y. Z	1157	56W/230V LED	7876/7640lm	acidato/frosted
NEF.5664. 0 X Y. Z	1437	70W/230V LED	9856/9560lm	acidato/frosted
CONTINUOUS INSTALLATION				
NEF.5671. 0 X Y. Z	622	28W/230V LED	3938/3820lm	acidato/frosted
NEF.5672. 0 X Y. Z	902	42W/230V LED	5918/5740lm	acidato/frosted
NEF.5673. 0 X Y. Z	1182	56W/230V LED	7876/7640lm	acidato/frosted
NEF.5674. 0 X Y. Z	1462	70W/230V LED	9856/9560lm	acidato/frosted

ACCESSORI / ACCESSORIES



NEF.PS
Sensore di presenza.
Presence sensor for ALU.



NEF.SO
Sospensione (coppia).
L=1700mm
Suspension (pair).
L=1700mm




CE	IP65
LED	RG1
CRI 80/90	Driver on/off incl.
L80 B10	Alu Body
50000H	Mac Adam 3
⏚	

05- anodizzato / anodised **Z.** COLOR

ALU PROOF

LOW LUMINANCE

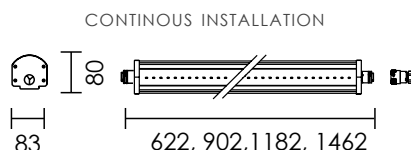

COD. ON/OFF	L.MM	W	LM	DIFFUSORE/ DIFFUSER
SINGLE INSTALLATION				
NEF.5666. 0 X Y. Z	597	17W/230V LED	2630/2380lm	acidato/frosted
NEF.5667. 0 X Y. Z	877	27W/230V LED	3945/3570lm	acidato/frosted
NEF.5668. 0 X Y. Z	1157	36W/230V LED	5260/4760lm	acidato/frosted
NEF.5669. 0 X Y. Z	1437	44W/230V LED	6575/5950lm	acidato/frosted
CONTINUOUS INSTALLATION				
NEF.5676. 0 X Y. Z	622	17W/230V LED	2630/2380lm	acidato/frosted
NEF.5677. 0 X Y. Z	902	27W/230V LED	3945/3570lm	acidato/frosted
NEF.5678. 0 X Y. Z	1182	36W/230V LED	5260/4760lm	acidato/frosted
NEF.5679. 0 X Y. Z	1462	44W/230V LED	6575/5950lm	acidato/frosted

X. CRI80 5

CRI90 6

Y. 4000K 7

3000K 8


DIM 1-10V A1

DALI A2

ACCESSORI / ACCESSORIES



NEF.PS
 Sensore di presenza.
 Presence sensor for ALU.



NEF.SO
 Sospensione (coppia).
 L=1700mm
 Suspension (pair).
 L=1700mm



