NET

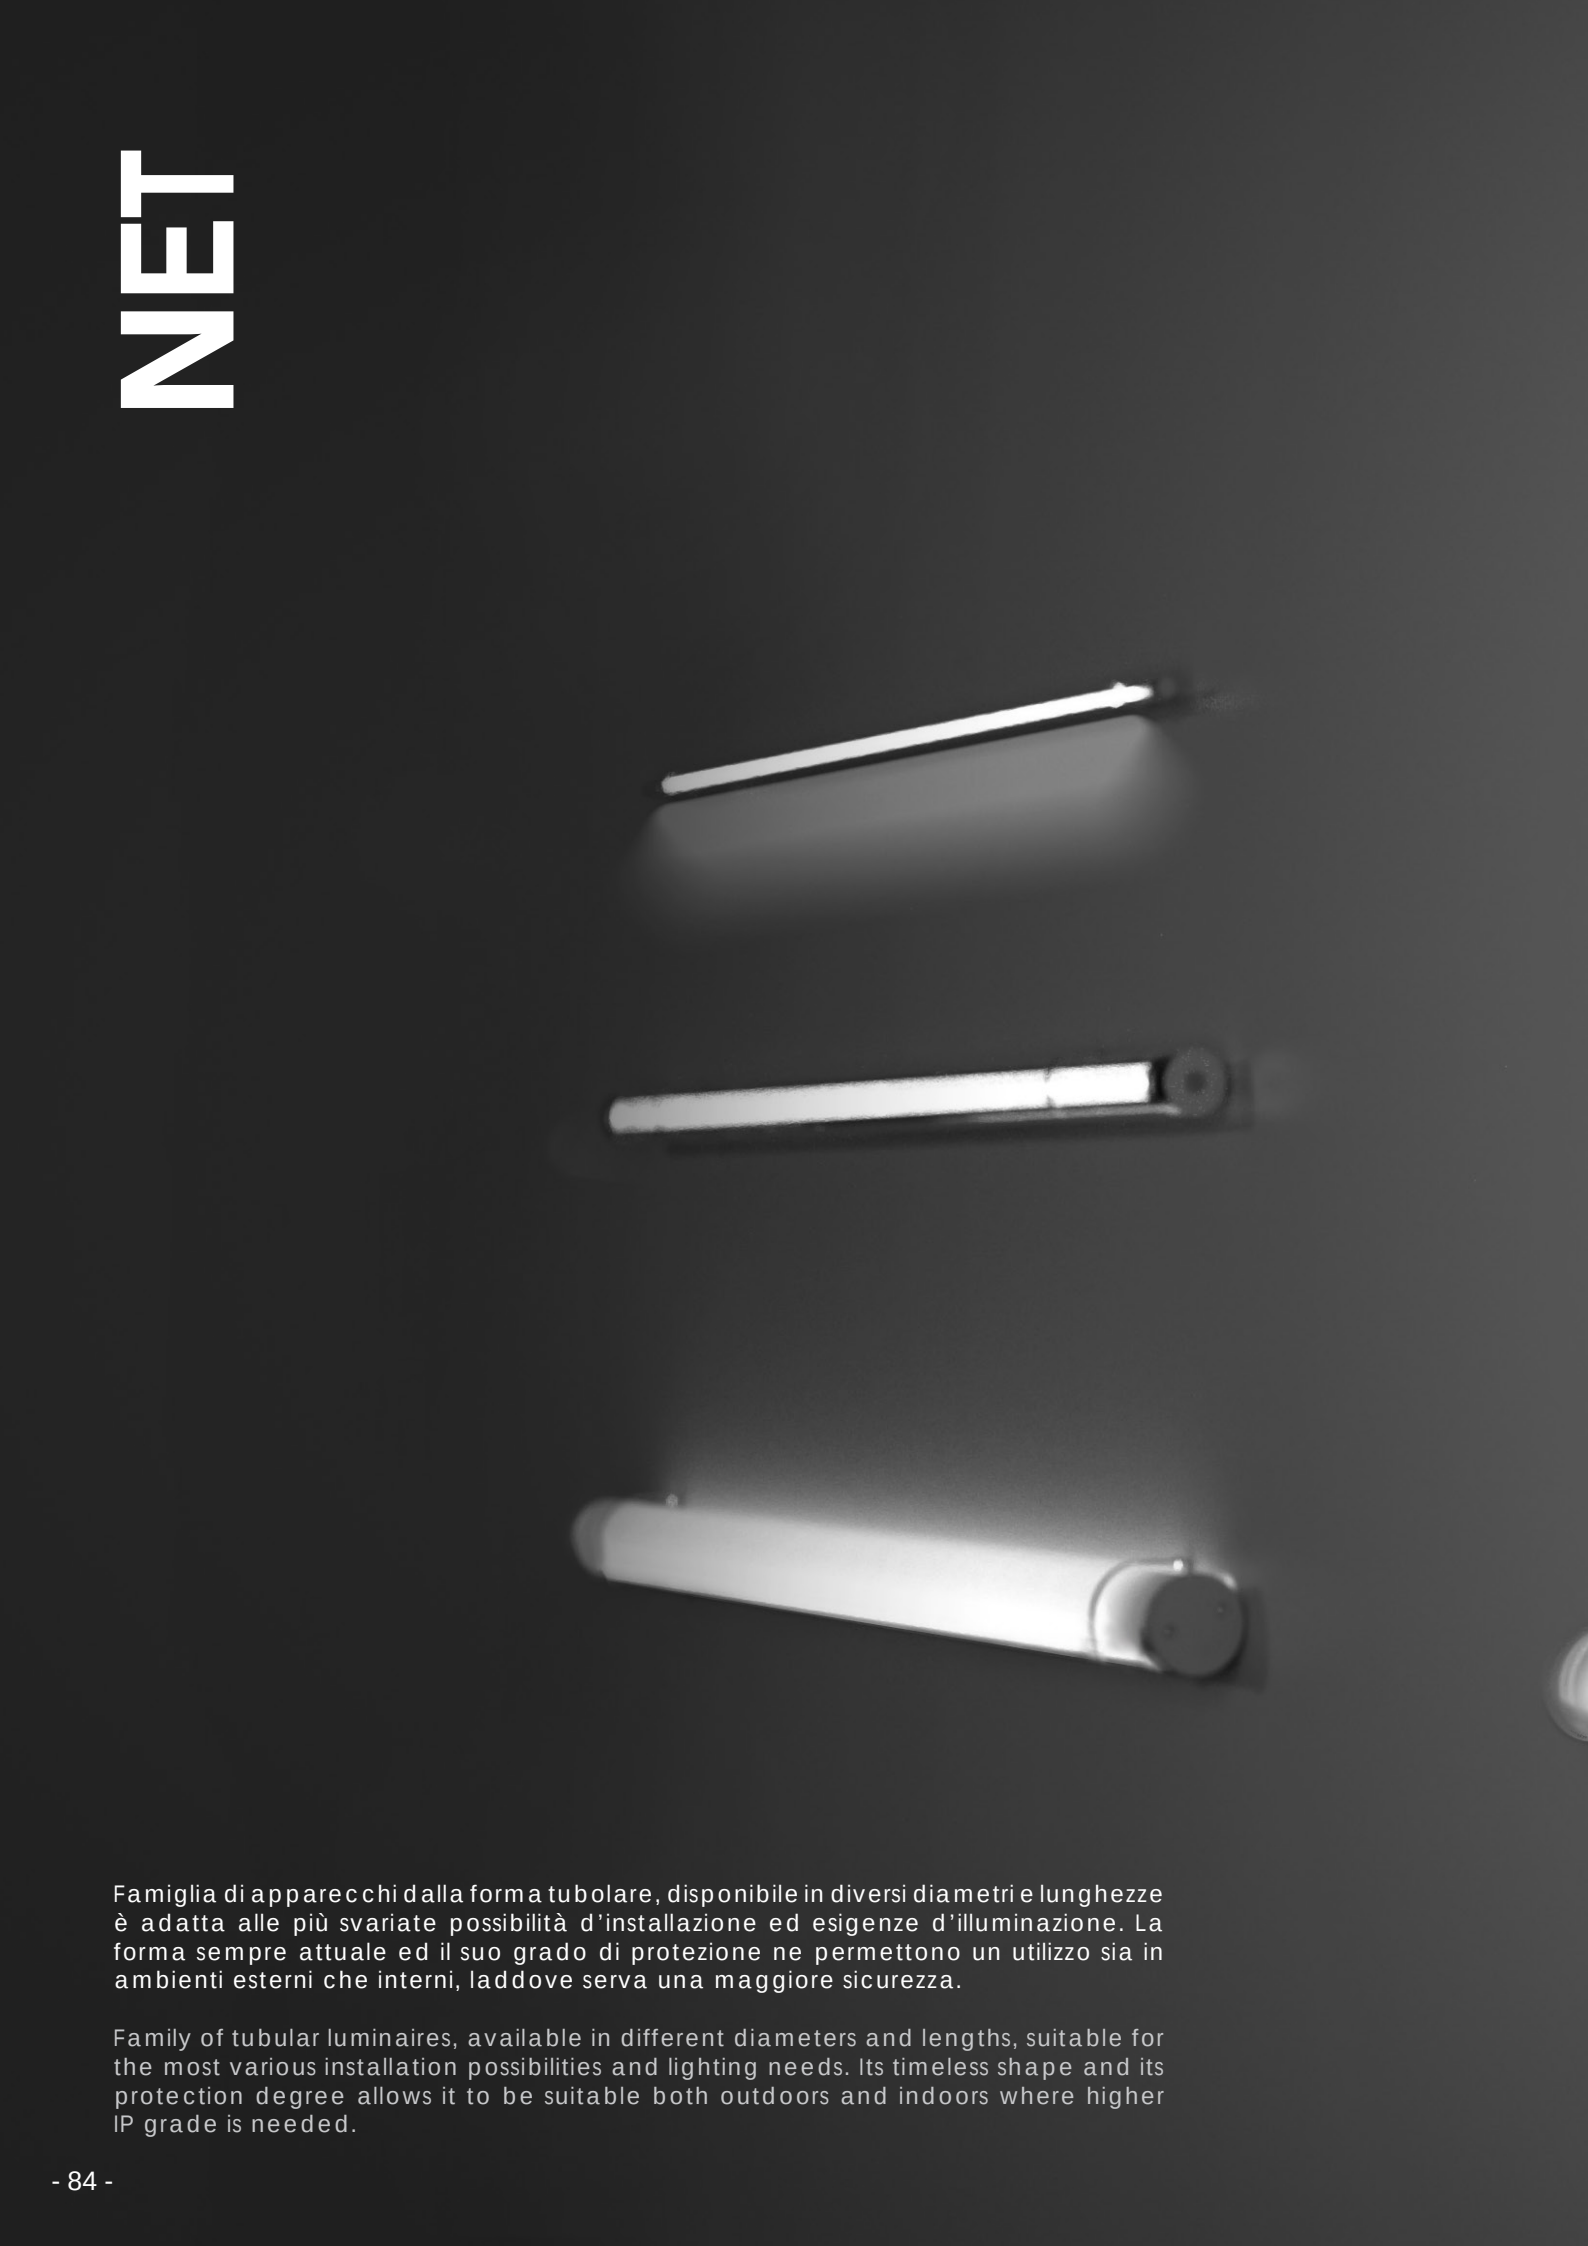

Famiglia di apparecchi dalla forma tubolare, disponibile in diversi diametri e lunghezze è adatta alle più svariate possibilità d'installazione ed esigenze d'illuminazione. La forma sempre attuale ed il suo grado di protezione ne permettono un utilizzo sia in ambienti esterni che interni, laddove serva una maggiore sicurezza.

Family of tubular luminaires, available in different diameters and lengths, suitable for the most various installation possibilities and lighting needs. Its timeless shape and its protection degree allows it to be suitable both outdoors and indoors where higher IP grade is needed.

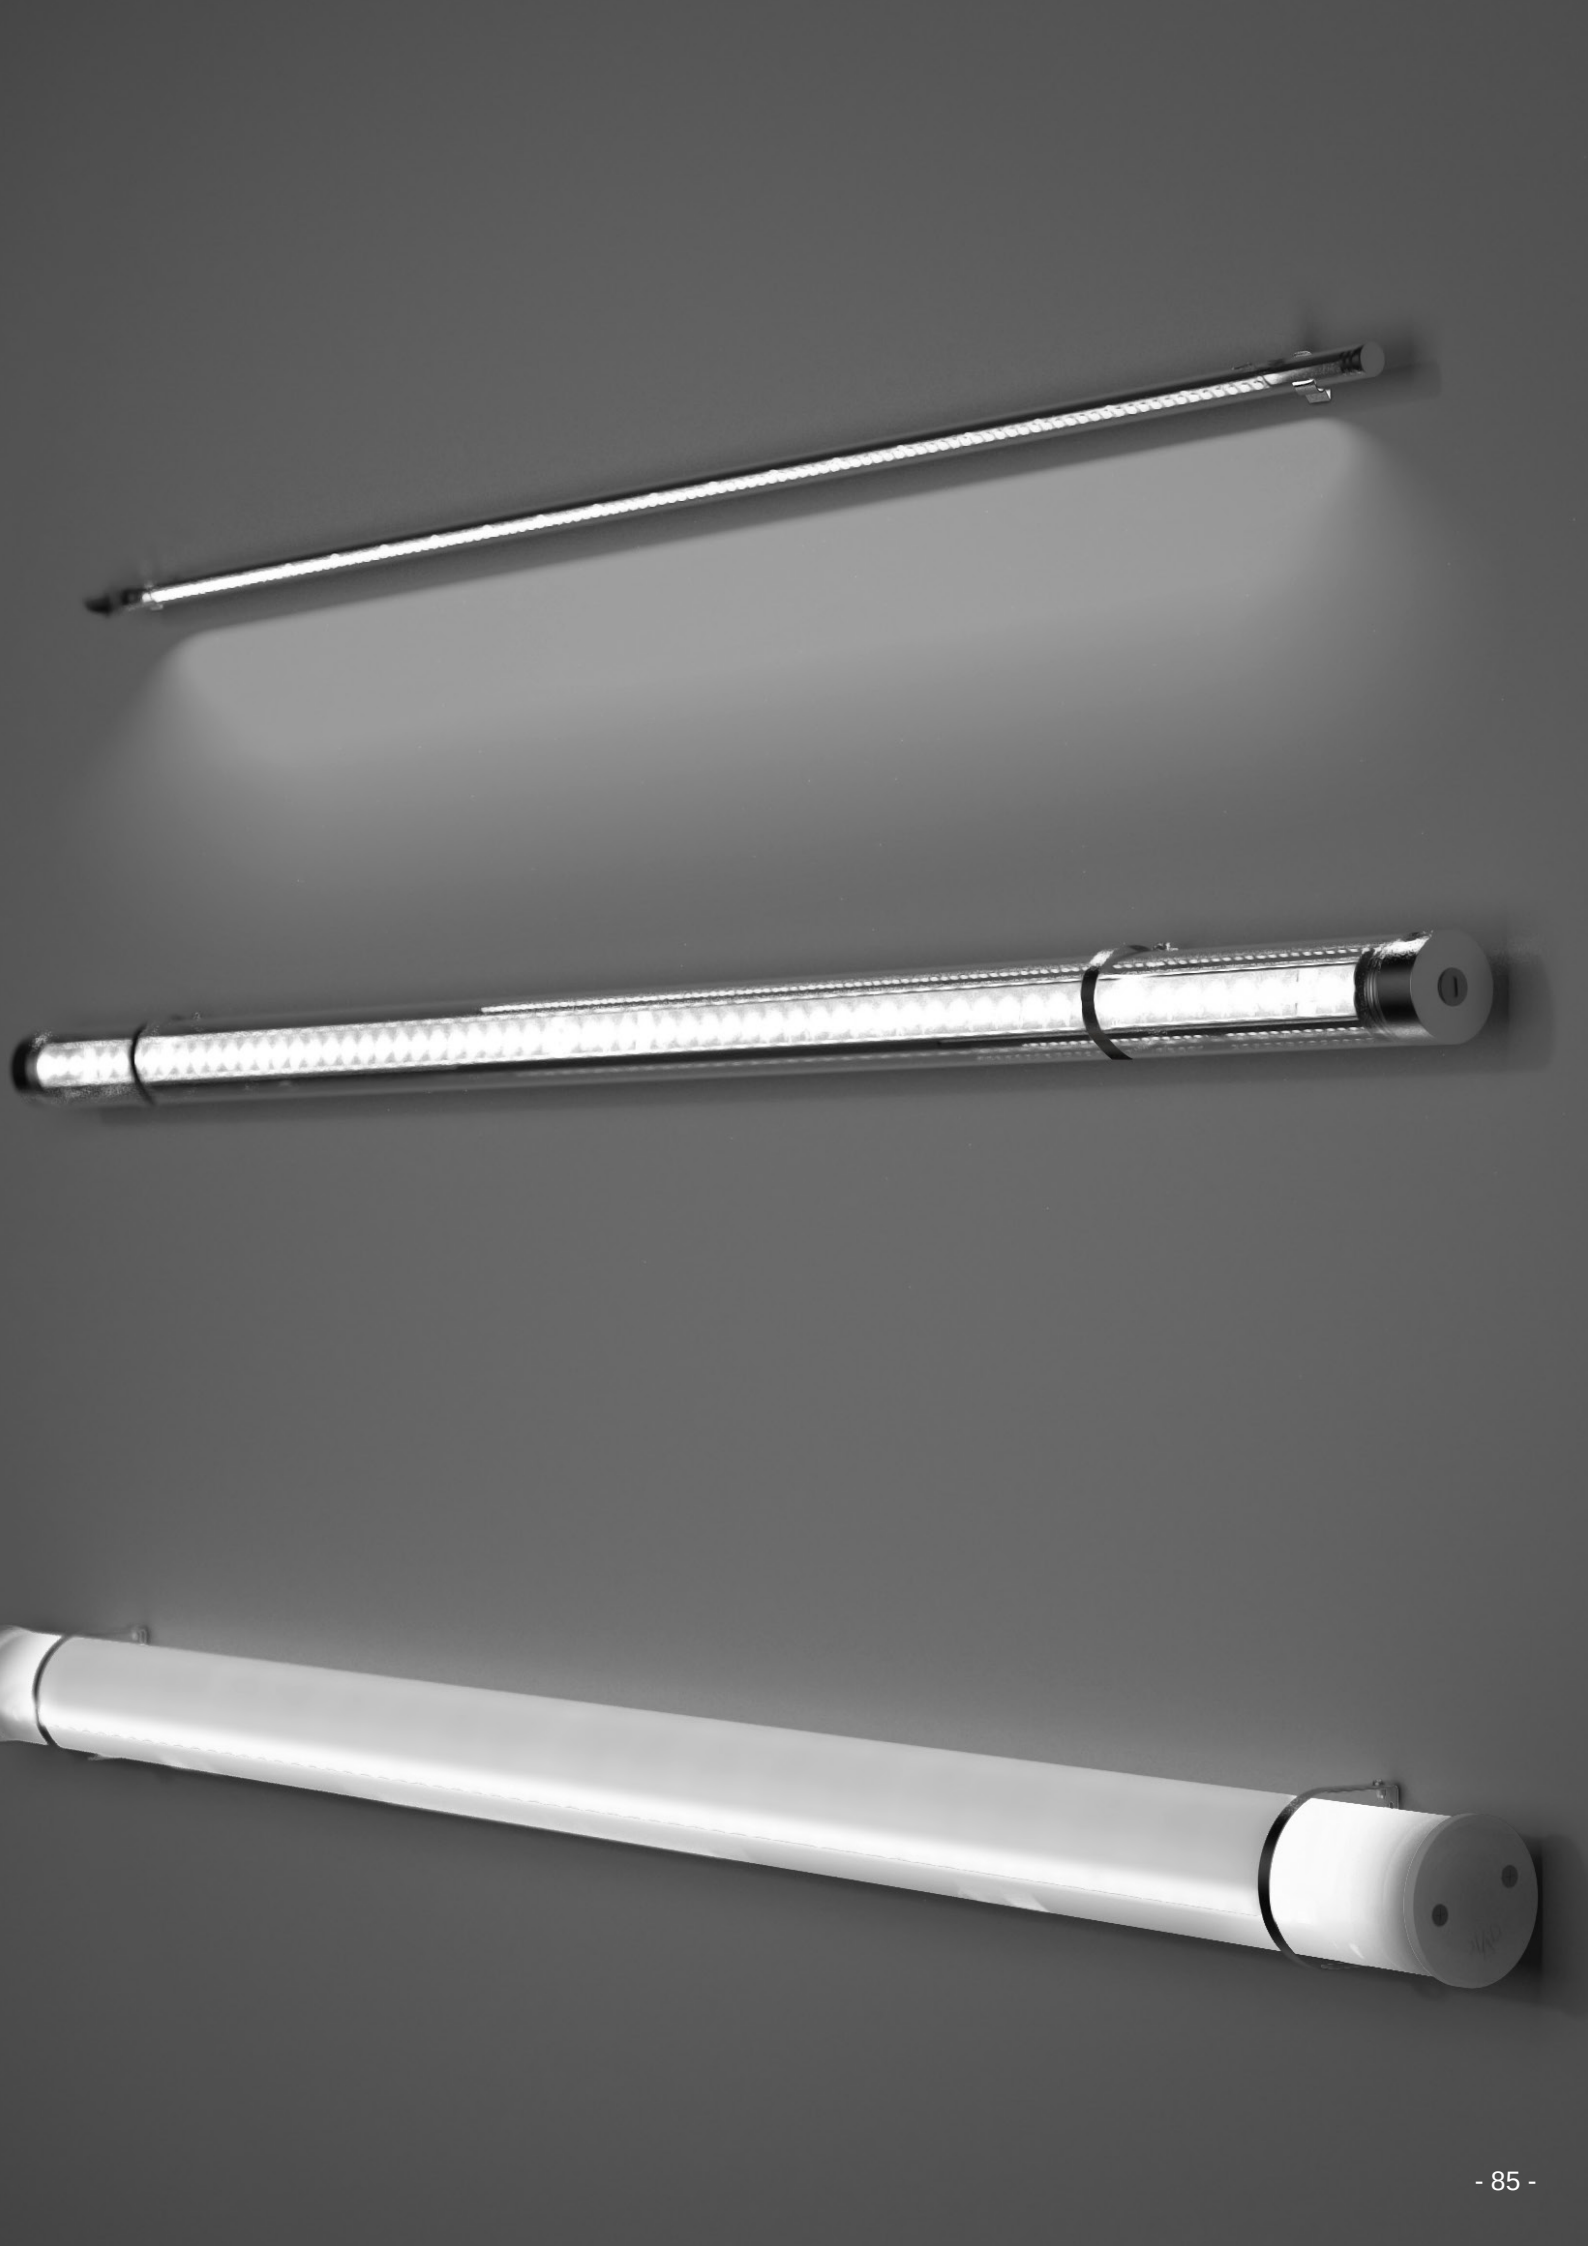

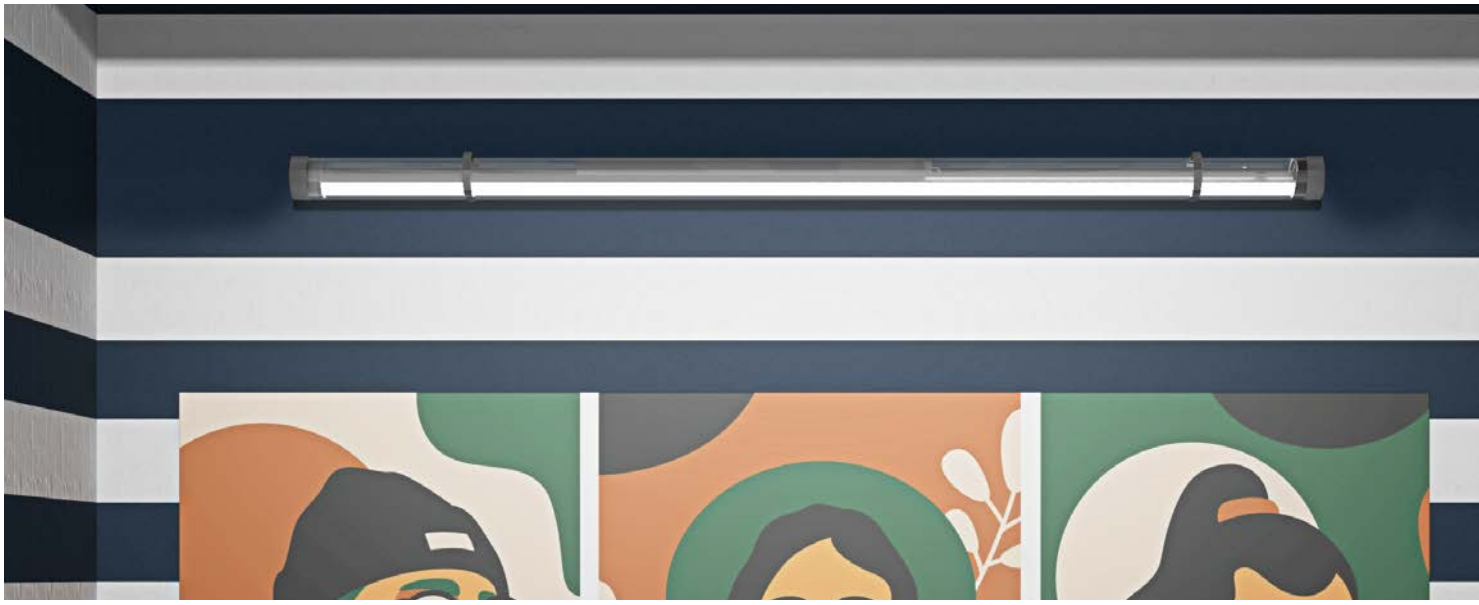

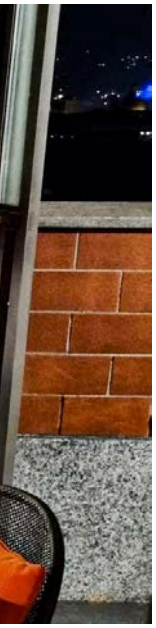

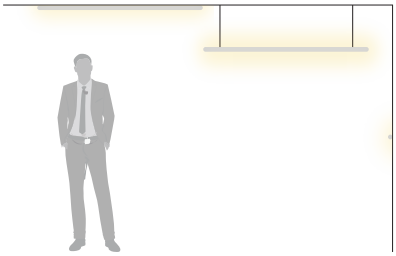

NET 16

Net 16 ha struttura interna in alluminio estruso, testate in lega di alluminio tornito sottoposte a trattamento di anodizzazione galvanica, diffusore in policarbonato trasparente o opale. Tono luce bianco 4000K, 3000K o 2700K, potenze da 9.6W/1050mm a 43.2W/3050mm. Staffe di fissaggio e cavo di collegamento H05RN-F 2x1mm² inclusi. Driver remoto da ordinare separatamente.

Net 16 has internal structure in extruded aluminum, end caps in turned aluminum alloy with galvanic anodizing treatment. Transparent or opal polycarbonate diffuser. 4000K, 3000K or 2700K LED white tone, power from 9.6W/1050mm up to 43.2W/3050mm. Supplied with fixing brackets and H05RN-F 2x1mm² connecting cable. Remote driver to be ordered separately.

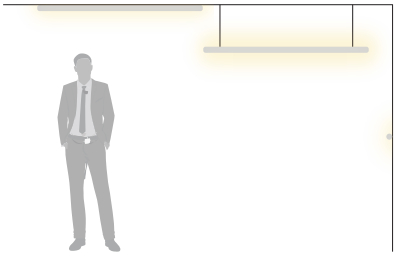

NET 50

Net 50 ha struttura interna in alluminio estruso, testate in lega di alluminio tornito sottoposte a trattamento di anodizzazione galvanica, diffusore in policarbonato esterno trasparente, interno satinato per luce diffusa o con lenti per luce concentrata. Tono bianco 4000K, 3000K o 2700K, potenze da 30W/1170mm a 42x1.2/1790mm. Alimentatore elettronico incluso.

Net 50 has internal structure in extruded aluminum, end caps in turned aluminum alloy with galvanic anodizing treatment, external transparent policarbonate diffuser with internal opal screen for diffuse emission or with lenses for concentrate light. 4000K, 3000K or 2700K LED white tone, power from 30W/1170mm up to 42x1.2W/1790mm. Electronic driver included.

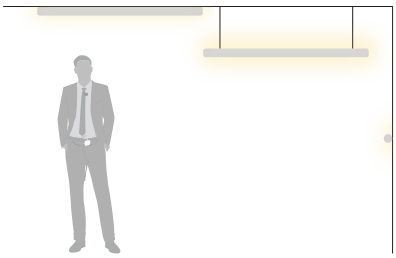

NET 70

Net 70 ha struttura interna in alluminio, testate in tecnopolimero resistente agli agenti atmosferici, diffusore in policarbonato opale. Tono luce bianco 4000K, 3000K o 2700K, potenze da 38W /1257mm a 58W/1817mm. Alimentatore elettronico incluso.

Net 70 has internal structure in aluminum, end caps in weather-resistant techno polymer, opal policarbonate diffuser. 4000K, 3000K or 2700K LED white tone, power from 38W/1257mm up to 58W/1817mm. Electronic driver included.

CE	LED
	IP65
RG0	Driver escl./excl.
L80 B10	50000H
CRI 90	

NET 16

COLOR

anodizzato/anodised - 05

CRI90 6

Y.
4000K 7

3000K 8

2700K 9



COD. ON/OFF	L.MM	W	LM	DIFFUSORE/DIFFUSER
		120 LED/M		
NES.3341. 1 6 Y. Z	1050	9.6W/24V LED	780/720/702	trasparente/transparent
NES.3341. 2 6 Y. Z	2050	19.2W/24V LED	1560/1440/1404	trasparente/transparent
NES.3341. 3 6 Y. Z	3050	28.8W/24V LED	2340/2160/2106	trasparente/transparent
NES.3351. 1 6 Y. Z	1050	9.6W/24V LED	780/720/702	opale/opal
NES.3351. 2 6 Y. Z	2050	19.2W/24V LED	1560/1440/1404	opale/opal
NES.3351. 3 6 Y. Z	3050	28.8W/24V LED	2340/2160/2106	opale/opal
		60 LED/M		
NES.3342. 1 6 Y. Z	1050	14.4W/24V LED	1060/990/969	trasparente/transparent
NES.3342. 2 6 Y. Z	2050	28.8W/24V LED	2120/1980/1938	trasparente/transparent
NES.3342. 3 6 Y. Z	3050	43.2W/24V LED	3180/2970/2907	trasparente/transparent
NES.3352. 1 6 Y. Z	1050	14.4W/24V LED	1060/990/696	opale/opal
NES.3352. 2 6 Y. Z	2050	28.8W/24V LED	2120/1980/1938	opale/opal
NES.3352. 3 6 Y. Z	3050	43.2W/24V LED	3180/2970/2907	opale/opal

ACCESSORI / ACCESSORIES

AAA.TRSL08
LED Driver IP20 30W 24V.

AAA.TRSL09
LED Driver IP20 75W 24V.

AAA.TRSL13
LED Driver IP67 70W 24V.

AAA.TRSL16
LED Driver IP67 150W 24V.

AAA.TRSL15
LED Driver IP65 8.4W 24V.



NES.SO
Sospensione (coppia).
L.1700mm
Suspension (pair).
L.1700mm

CE	LED
⏚	IP67
RG0	Driver on/off incl.
L80 B10	50000H
CRI 90	

05 - anodizzato/anodised

COLOR

NET 50

DIFFUSORE/DIFFUSER



LENTI/LENS



COD. ON/OFF	L.MM	W	LM	FASCIO/BEAM
		DIFFUSORE/DIFFUSER		
NET.5743. 0 6 Y. Z	1170	30W/230V LED	2304/2088/2032	diffuso/diffused
NET.5744. 0 6 Y. Z	1450	37W/230V LED	2930/2657/2575	diffuso/diffused
NET.5745. 0 6 Y. Z	1750	45W/230V LED	3560/3226/3125	diffuso/diffused
		LENTI/LENS		
NET.5746. D 6 Y. Z	1210	28x1.2W/230V LED	3016/2590/2462	15°/30°/10x45°
NET.5747. D 6 Y. Z	1500	35x1.2W/230V LED	3769/3237/3077	15°/30°/10x45°
NET.5748. D 6 Y. Z	1790	42x1.2W/230V LED	4272/3669/3488	15°/30°/10x45°

D.
15° 1
30° 2
10x45° 3
CRI90 6
Y.
4000K 7
3000K 8
2700K 9
DIM
DALI
A2

ACCESSORI / ACCESSORIES

NET.SO5
Sospensione (coppia).
L.1700mm
Suspension (pair).
L.1700mm

NET.AP5
Attacco a parete o soffitto (coppia).
Wall or ceiling mount (pair).

CE	LED
	IP65
RG0	Driver on/off incl.
L80 B10	50000H
CRI 80/90	

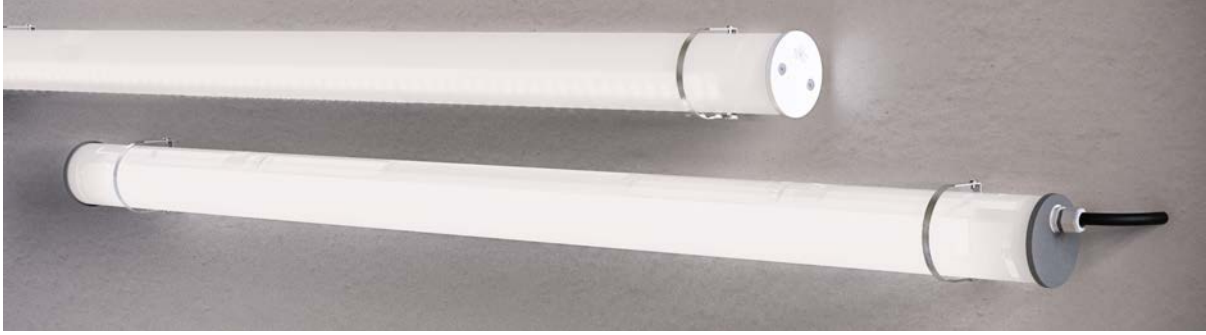

NET 70

COLOR

grigio metallico/metallic grey - **28**

X.
CRI80 **5**

CRI90 **6**

DIM **A2**



COD. ON/OFF	L.MM	W	K	LM	DIFFUSORE/DIFFUSER
NEV.5713. 1 X 7. Z	1257	38W/24V LED	4000K	5640	opale/opal
NEV.5713. 1 X 8. Z	1257	38W/24V LED	3000K	5320	opale/opal
NEV.5713. 1 X 9. Z	1257	38W/24V LED	2700K	5224	opale/opal
NEV.5714. 1 X 7. Z	1537	48W/24V LED	4000K	7060	opale/opal
NEV.5714. 1 X 8. Z	1537	48W/24V LED	3000K	6660	opale/opal
NEV.5714. 1 X 9. Z	1537	48W/24V LED	2700K	6540	opale/opal
NEV.5715. 1 X 7. Z	1817	58W/24V LED	4000K	8480	opale/opal
NEV.5715. 1 X 8. Z	1817	58W/24V LED	3000K	8000	opale/opal
NEV.5715. 1 X 9. Z	1817	58W/24V LED	2700K	7856	opale/opal

ACCESSORI / ACCESSORIES

NEV.AP2
Attacco a parete o soffitto (coppia).
Wall or ceiling mount (pair).

NEV.AP4
Attacco a parete o soffitto (coppia).
Wall or ceiling mount (pair).

NEV.SO
Sospensione (coppia).
L.1700mm
Suspension kit (pair).
L.1700mm