

# T-UNI

## T-Uni Recessed



T-Uni è una famiglia di sistemi lineari LED installabili singolarmente in molteplici modalità: in fila continua, a plafone, sospensione ed incasso nel controsoffitto. Elegante nel design, si presta alle applicazioni più diverse, integrandosi perfettamente in contesti residenziali, commerciali, business ed education.

T-Uni is a family of LED linear systems for single or continuous lines, for ceiling, suspended or recessed use. Its elegant design perfectly integrates T-Uni to various applications in residential, commercial and business environments.



# T-Uni Recessed Frameless





## T-UNI RECESSED

Corpo in lega di alluminio, testate in acciaio, verniciatura a polveri. Diffusore in policarbonato opale o microprismato. Tono luce bianco 5500K, 4000K, 3000K o 2700K. Potenze da 28W/1130mm a 63W/2530mm. Alimentatore elettronico e diffusore inclusi. Testate, giunti lineari ed accessori per l'incasso da ordinare separatamente.


Structure in aluminium alloy, steel end caps, powder coating. Opal or microprismatic diffuser. LED in 5500K, 4000K, 3000K or 2700K white light tone. Powers from 28W/1130mm up to 63W/2530mm. Electronic driver and diffuser included. End caps, linear joint and kit for recessed installation to be ordered separately.



## T-UNI RECESSED FRAMELESS

Corpo in lega di alluminio, testate in acciaio, verniciatura a polveri. Diffusore in policarbonato opale o microprismato. Tono luce bianco 5500K, 4000K, 3000K o 2700K. Potenze da 28W/1130mm a 63W/2530mm. Alimentatore elettronico e diffusore inclusi. Testate, giunti lineari ed accessori per l'incasso da ordinare separatamente.

Structure in aluminium alloy, steel end caps, powder coating. Opal or microprismatic diffuser. LED in 5500K, 4000K, 3000K or 2700K white light tone. Powers from 28W/1130mm up to 63W/2530mm. Electronic driver and diffuser included. End caps, linear joint and kit for recessed installation to be ordered separately.

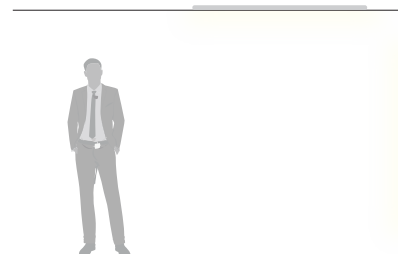

|           |                     |
|-----------|---------------------|
| CE        | LED                 |
| IP43      |                     |
| RG0       | Driver on/off incl. |
| L80 B10   | 50000H              |
| CRI 80/90 |                     |



## T-UNI RECESSED

Z.  
COLOR

bianco/white - 02   
nero/black - 03   
custom - 99 

D.  
OPALE  
OPAL  
0

MICROPRISM.  
9

X.  
CRI80  
5

CRI90  
6


Y.  
5500K  
6

4000K  
7


3000K  
8

2700K  
9

DIM  
A2



▶ 1425x58 ◀  
Cutout / Foro: 98x31mm

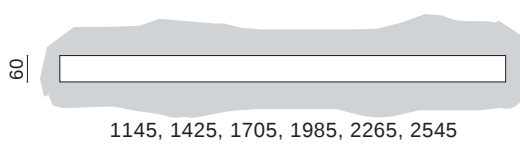

COD. ON/OFF

L.MM

W

LM

|                    |      |              |                     |
|--------------------|------|--------------|---------------------|
| TNC.3443. D X Y. Z | 1130 | 28W/230V LED | 3920/3820/3620/3560 |
| TNC.3444. D X Y. Z | 1410 | 35W/230V LED | 4910/4780/4540/4468 |
| TNC.3445. D X Y. Z | 1690 | 42W/230V LED | 5880/5730/5430/5340 |
| TNC.3446. D X Y. Z | 1970 | 49W/230V LED | 6870/6690/6350/6248 |
| TNC.3447. D X Y. Z | 2250 | 56W/230V LED | 7840/7640/7240/7120 |
| TNC.3448. D X Y. Z | 2530 | 63W/230V LED | 8830/8600/8160/8028 |

### ACCESSORI / ACCESSORIES



**TNC.CA**  
Cavo anticaduta.  
Suspension cable.



**TNC.MF**  
Staffa di fissaggio.  
Fixing bracket.



**TNC.TE**  
Testata di chiusura.  
End cap.



**TNC.CD**  
Giunto lineare.  
Linear joint.




|           |                     |
|-----------|---------------------|
| CE        | LED                 |
| IP43      |                     |
| RG0       | Driver on/off incl. |
| L80 B10   | 50000H              |
| CRI 80/90 |                     |


- 02 - bianco/white
- 03 - nero/black
- 99 - custom

Z.  
COLOR

## T-UNI RECESSED FRAMELESS



1425x58  
Cutout / Foro: 98x31mm

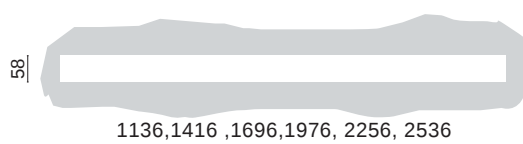

| COD. ON/OFF        | L.MM | W            | LM                  |
|--------------------|------|--------------|---------------------|
| TNE.3423. D X Y. Z | 1130 | 28W/230V LED | 3920/3820/3620/3560 |
| TNE.3424. D X Y. Z | 1410 | 35W/230V LED | 4910/4780/4540/4468 |
| TNE.3425. D X Y. Z | 1690 | 42W/230V LED | 5880/5730/5430/5340 |
| TNE.3426. D X Y. Z | 1970 | 49W/230V LED | 6870/6690/6350/6248 |
| TNE.3427. D X Y. Z | 2250 | 56W/230V LED | 7840/7640/7240/7120 |
| TNE.3428. D X Y. Z | 2530 | 63W/230V LED | 8830/8600/8160/8028 |

D.  
OPALE  
OPAL  
0

MICROPRISM.  
9

X.  
CRI80  
5

CRI90  
6

Y.  
5500K  
6

4000K  
7

3000K  
8

2700K  
9

DIM  
A2

### ACCESSORI / ACCESSORIES



**TNE.CA**  
Cavo anticaduta.  
Suspension cable.



**TNE.MF**  
Staffa di fissaggio.  
Fixing bracket.



**TNE.TE**  
Testata di chiusura.  
End cap.



**TNE.CD**  
Giunto lineare.  
Linear joint.