

ULISSE



Ulisse è un profilo tubolare da interni con effetto luminoso ininterrotto dal design pulito e minimale. Adatto all'illuminazione di ampi spazi domestici, lavorativi e architeturali. Permette un'ottimale diffusione della luce a file singole e continue.

Ulisse is a tubular profile for interiors with an uninterrupted lighting effect with a clean and minimal design. Suitable for lighting large domestic, work and architectural spaces. It allows an optimal diffusion of light in single and continuous rows.



ULISSE

Profilo tubolare per installazione a soffitto o a sospensione. Corpo in alluminio estruso verniciato a polvere. Diffusore opale. Disponibile anche nelle versioni dimmerabili.

Tubular system for ceiling or suspended installation. Body made in powder coated extruded aluminium. Opal diffuser. Available also in dimmable versions.

CE	LED
IP20	
RG0	Driver on/off incl.
L80 B10	50000H
CRI 80/90	



ULISSE

Z.
COLOR

bianco/white - **02** ☐
custom - **99** ☐

OPALE
OPAL
0

X.
CRI80
5

CRI90
6



Y.
4000K
7

3000K
8

2700K
9

DIM

A2

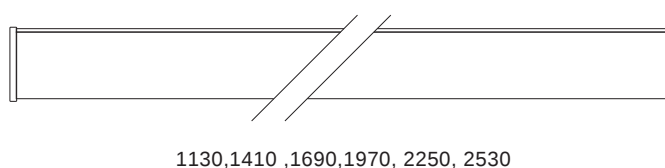

COD. ON/OFF

L.MM

W

LM

ULS.3363. 0 X Y. Z	1130	56W/230V LED	7640/7240/7120
ULS.3364. 0 X Y. Z	1410	70W/230V LED	9560/9080/8600
ULS.3365. 0 X Y. Z	1690	84W/230V LED	11460/10860/10680
ULS.3366. 0 X Y. Z	1970	97W/230V LED	13380/12700/12496
ULS.3367. 0 X Y. Z	2250	112W/230V LED	15280/14480/14240
ULS.3368. 0 X Y. Z	2530	126W/230V LED	17200/16320/16056

ACCESSORI / ACCESSORIES




AAA.RA2
Rosone alimentato basic.
Power supply basic.



ULS.AP
Attacco a parete e plafone
(coppia).
Wall and ceiling bracket (pair).



ULS.SO
Sospensioni L.1700mm (coppia).
Suspension kit L.1700mm (pair).



ULS.TE
Testata di chiusura.
End cap.



ULS.CD
Giunto lineare (coppia).
Linear joint (pair).

