



Spider Incasso Led RGB 1291mm 27x1.2W, 718lm, lente fascio medio, driver escluso, anodizzato

Spider Incasso Led RGB 1291mm, 27x1.2W, medium beam lenses, driver excluded, natural anodized.

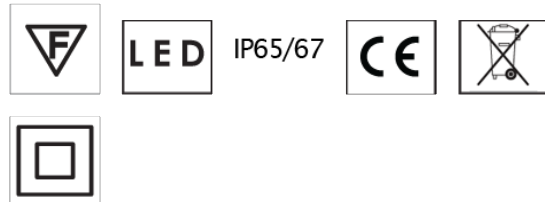

### Descrizione/Description

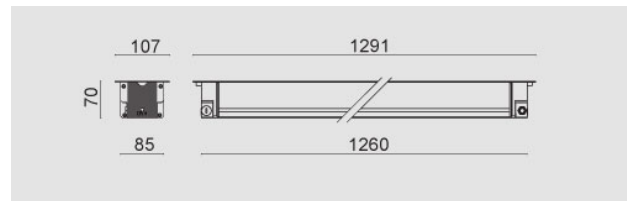

IT: Spider Incasso è adatto a installazioni per un uso a pavimento, a parete o a soffitto. È caratterizzato da un profilo sottile e dalla forma lineare e dalla possibilità di essere utilizzato sia singolarmente che in file continue, adatto a luoghi di passaggio come porticati o camminamenti ma anche a grandi spazi aperti. La struttura è in estruso di alluminio, finitura anodizzata, con diffusore in vetro temperato (sp. 6 mm), testate in alluminio pressofuso, guarnizioni in silicone e viteria in acciaio inox A4. Versioni LED RGB con lenti a fascio stretto o medio, con vetro trasparente. misure 991mm o 1291mm. LED RGB 18x1W (478lm) o 27x1W (718lm). Grado di protezione IP65. Elevata resistenza meccanica. Driver escluso. La struttura è in estruso di alluminio, finitura anodizzata, con diffusore in vetro temperato (sp. 6 mm), testate in alluminio pressofuso, guarnizioni in silicone e viteria in acciaio inox A4. Versioni LED RGB con lenti a fascio stretto o medio, con vetro trasparente. misure 991mm o 1291mm. LED RGB 18x1W (478lm) o 27x1W (718lm). Grado di protezione IP65. Elevata resistenza meccanica. Driver escluso.

ENG: Spider Incasso, designed for the installation on the floor, has turned out to be also suitable for wall and ceiling use. Because of its thin profile and the linear shape, it can be used individually or in continuous lines, suitable for passageways as arcades or walkways, but also for big open-spaces. The structure is made of extruded aluminum, anodized finish, diffuser in tempered glass (6mm), cast aluminum heads, silicone gaskets and stainless steel screws A4. LED versions with medium or narrow beam lenses, with tempered transparent glass, with measures 991mm or 1291mm. LED RGB 18x1W (478lm) or 27x1W (718lm). IP65 protection. High mechanical strength. Driver included.

Codice/Code

JAD.5838.299.05

CIVIC S.r.l


Via Goldoni, 50 - 20090 Trezzano S/N (MI)

tel. +39 0248405581

[www.civic.it](http://www.civic.it) - [info@civic.it](mailto:info@civic.it)

**CIVIC**  
LIGHT IN ITALY

<b>Potenza/Power</b>	27x1,2W
<b>Colore/Color</b>	Anodizzato naturale
<b>Fascio luminoso/Light beam</b>	Fascio 30°

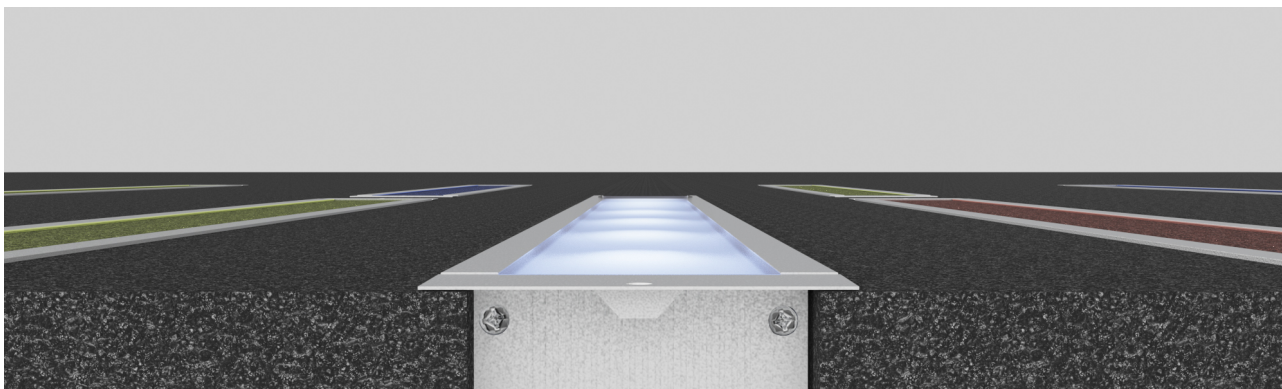

### Accessori/Accessories



**AAA.CN3000.00**  
Connettore IP68, 3 vie.

AAA.CN3000.00  
IP68 waterproof connector, 3 ways.



**AAA.CN4000.00**  
Connettore IP68, 4 vie.

AAA.CN4000.00  
IP68 waterproof connector - 4 ways.



**AAA.TRSL23.00**  
Driver per apparecchi con led RGB

AAA.TRSL23.00  
Driver for RGB version.



**AAA.TRSL25.00**  
Interfaccia DMX

AAA.TRSL25.00  
DMX interface.




**AAA.TRSL26.00**  
Sistema di controllo ad infrarossi con telecomando

AAA.TRSL26.00  
Infrared system with remote control.




AAA.TRSL27.00  
Centralina di controllo DMX-TOUCH

AAA.TRSL27.00  
DMX - TOUCH Control Unit.

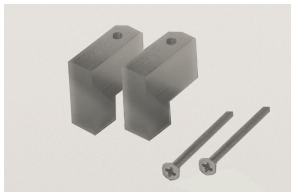

DUC.MF3000.00  
Gancio di fissaggio parete/soffitto - coppia.

DUC.MF3000.00  
Fixing hook for ceiling use (pair).

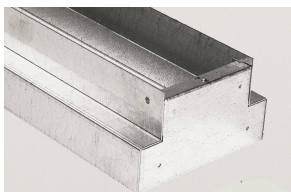

JAD.C54000.05  
Spider Incasso cassaforma 1291mm

JAD.C54000.05  
Spider Incasso recessed housing (1291 mm) in galvanized plate (1 mm thickness). Natural anodized.



JAD.CA0000.05  
Spider Incasso cavo acciaio

JAD.CA0000.05  
Spider Incasso steel cable for ceiling installation. Natural anodized.



JAD.PC0000.00  
Pressacavo IP 65

JAD.PC0000.00  
Cable gland IP65.