





Raggio Up, 1Ledx1,2/2,4W, 350/700mA, 3000K, fascio 15°, grigio metallizzato.

Raggio Up, Led1x1,2W/2,4W, 350/700mA, 3000K, 15° beam, metallic grey.




### Descrizione/Description

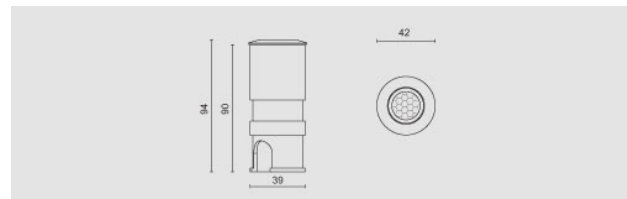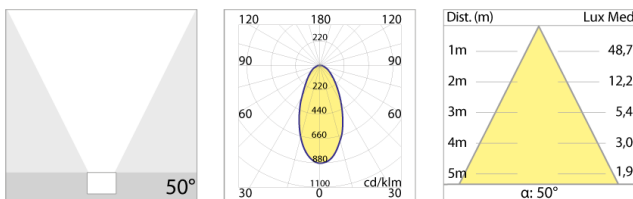

IT: Corpo e anello di chiusura in lega di alluminio sottoposti a pre-trattamento di anodizzazione galvanica. Grado di protezione IP67. Schermo di protezione in vetro trasparente temperato di spessore 10mm con resistenza meccanica IK 10 per passaggio veicolare. Equipaggiato con un LED di colore bianco 4000K o 3000K da alimentare con trasformatore in corrente costante da cablare in serie. Potenze da 1.2W a 2.4W. Fornito completo di cavo di collegamento H05RN-F 2x1mm<sup>2</sup>.

ENG: Body and closing ring in aluminum alloy with galvanic anodizing pre-treatment. IP67 protection degree. Protection shield made of transparent tempered glass with 10mm thickness and IK 10 shock resistance for vehicle passage use. Equipped with one LED in 4000K or 3000K color to be supplied with constant current driver (serial connection). Power from 1.2W to 2.4W. Supplied with H05RN-F 2x1mm<sup>2</sup> connecting cable.

<b>Codice/Code</b>	LAA.5101.158.50
<b>Tonalità/Light tone</b>	3000K
<b>Potenza/Power</b>	1 LEDx1,2W/2,4W 350/700mA
<b>Colore/Color</b>	Grigio opaco metallizzato
<b>Fascio luminoso/Light beam</b>	Fascio 15°

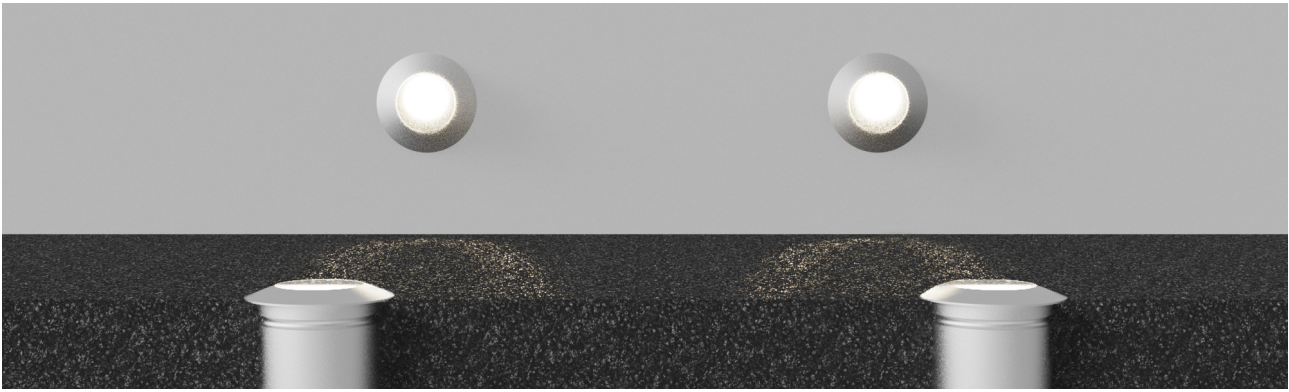

### Accessori/Accessories



AAA.TRSL00.00  
Driver LED corrente costante 3W 350mA

AAA.TRSL00.00  
LED driver constant current 3W 350mA.



AAA.TRSL05.00  
Driver LED corrente costante 19W 350/700mA

AAA.TRSL05.00  
LED driver constant current 19W 350/700mA.



AAA.TRSL30.00  
Driver LED corrente costante 3W 700mA

AAA.TRSL30.00  
LED driver constant Current 3W 700mA.