
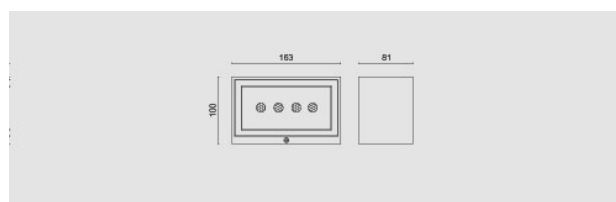


Mini Apollo con lenti, 4,8W luce diretta, 4000K, bianco raggrinzante.

Apollo is a family of products ideal to enlighten facades, external pathways and environments where an high IP rate is needed. It's available in different versions sizes and for different uses. It's essential shape makes it adapt to many different environments, from domestic ones to the big architectural buildings. The structure is in die cast aluminum powder coated. LED: 4000K or 3000K white light tone, emission direct and direct / indirect, with narrow or wide beam lenses, wide beam reflector or diffuse beam. Powers from 4,8W/456lm with direct light up to 9,6W/752lm direct/indirect light.

### Descrizione/Description



IT: Apollo è una famiglia di prodotti che risulta ideale per l'illuminazione di facciate, percorsi in esterni e luoghi in cui sia richiesto un elevato grado di protezione. È disponibile in diverse dimensioni ed utilizzi, in versione a luce diretta e diretta/indiretta. La sua forma essenziale lo rende adatto alle ambientazioni più diverse, dalle domestiche ai grandi spazi architettonici. La struttura è in fusione di alluminio verniciato a polveri epossipoliestere. vetro temperato trasparente/sabbiato. LED: tono luce bianco 4000K o 3000K, emissione diretta e diretta/indiretta, con lenti a fascio stretto e largo, con riflettore a fascio largo o luce diffusa. Potenze a partire da 4,8W/456lm luce diretta fino a 9,6W/752lm luce diretta/indiretta.

ENG: Apollo is a family of products ideal to enlighten facades, external pathways and environments where an high IP rate is needed. It's available in different versions sizes and for different uses. It's essential shape makes it adapt to many different environments, from domestic ones to the big architectural buildings. The structure is in die cast aluminum powder coated. LED: 4000K or 3000K white light tone, emission direct and direct / indirect, with narrow or wide beam lenses, wide beam reflector or diffuse beam. Powers from 4,8W/456lm with direct light up to 9,6W/752lm direct/indirect light.

<b>Codice/Code</b>	MTA.5416.157.32
<b>Tonalità/Light tone</b>	4000K
<b>Potenza/Power</b>	4,8W
<b>Fusso luminoso/Luminous flux</b>	01 lm - 500 lm
<b>Colore/Color</b>	Bianco Raggrinzante
<b>Fascio luminoso/Light beam</b>	Fascio 60°
<b>Driver/Driver</b>	Driver On/Off



