




Mini Tebe testa, 10W, 24V, 3000K, antracite

Mini Tebe head, 10W, 24V, 3000K, anthracite



Descrizione/Description

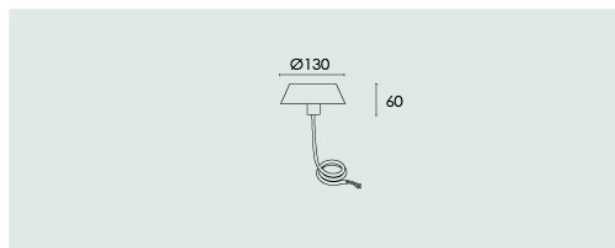

IT: Testa in acciaio inox con verniciatura a polvere di poliestere. Steli in policarbonato o acciaio inox verniciato. Schermo in policarbonato opale. Guarnizione in gomma di silicone. Equipaggiato con LED 4000K, 3000K o 2700K. Potenza 10W. Proposto in due soluzioni, a 230V o 24V. Grado di protezione IP65. Rischio fotobiologico RG0. Cavo di collegamento H05RN-F.

ENG: Head made of stainless steel with polyester powder coating. Stems in polycarbonate or stainless steel coated. Opal polycarbonate diffuser. Silicone rubber gasket. Equipped with white LED 4000K, 3000K or 2700K. Power 10W. Available in 230V or 24V. IP65 protection degree. Photobiological risk RG0. Supplied complete with H05RN-F connection cable.

Codice/Code	MTY.7124.058.06
Tonalità/Light tone	3000K
Potenza/Power	10W
Fusso luminoso/Luminous flux	1001 lm - 1500 lm
Colore/Color	Grigio antracite
Driver/Driver	Driver On/Off



Accessori/Accessories



AAA.CN2000.00
Connettore IP68, 2 vie.

AAA.CN2000.00
IP68 waterproof connector, 2 ways.



AAA.TRSL08.00
Driver LED tensione costante 24V 30W

AAA.TRSL08.00
Driver LED constant voltage 24V 30W.



AAA.TRSL13.00
Driver LED 24V 70W IP67

AAA.TRSL13.00
Driver LED constant voltage 24V 70W IP67.



LAA.SP00.000.00
Picchetto Inox

LAA.SP00.000.00
Inox Spike.



MTY.CM000000.00
Cassaforma mini / micro Tebe

MTY.CM000000.00
Mini / Micro Tebe recessed box



MTY.ST.029.06
Micro o Mini Tebe, Stelo inox verniciato H=290mm, antracite

MTY.ST.029.06
Micro or Mini Tebe, painted stainless steel pole H=290mm, anthracite



MTY.ST.084.06
Micro o Mini Tebe, Stelo inox verniciato H=840mm, antracite

MTY.ST.084.06
Micro or Mini Tebe, painted stainless steel pole H=840mm, anthracite



MTY.ST.115.06
Micro o Mini Tebe, Stelo inox verniciato H=1150mm, antracite

MTY.ST.115.06
Micro or Mini Tebe, painted stainless steel pole H=1150mm, anthracite