




NET 16 3050mm, 28,8W 24V, CRI90, 4000K, driver escluso , anodizzato

NET 16 3050mm, 28,8W 24V 4000K, natural anodized.

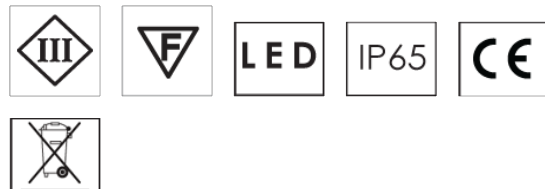

### Descrizione/Description

IT: Famiglia di apparecchi dalla forma tubolare, disponibile in diversi diametri e lunghezze è adatta alle più svariate possibilità d'installazione ed esigenze d'illuminazione. La forma sempre attuale ed il suo grado di protezione IP65 ne permette un utilizzo sia in ambienti esterni che interni laddove serva un maggiore sicurezza. Net 16 ha struttura interna in alluminio estruso, testate in lega di alluminio tornito sottoposte a trattamento di anodizzazione galvanica, diffusore in policarbonato trasparente o opale. Tono luce bianco 4000K o 3000K, potenze da 9.6W/1050mm a 43.2W/3050mm. Staffe di fissaggio e cavo di collegamento H05RN-F 2x1mm<sup>2</sup> inclusi. Driver remoto da ordinare separatamente.

ENG: Family of tubular luminaires, available in different diameters and lengths, suitable for the most various installation possibilities and lighting needs. Its timeless shape and its degree of protection IP65 allows it to be suitable both outdoors and indoors where higher IP grade is needed. Net 16 has internal structure in extruded aluminum, end caps in turned aluminum alloy with galvanic anodizing treatment. Transparent or opal polycarbonate diffuser. 4000K or 3000K LED white tone, power from 9.6W/1050mm to 43.2W/3050mm. Supplied fixing brackets and H05RN-F 2x1mm<sup>2</sup> connecting cable. Remote driver to be ordered separately.

<b>Codice/Code</b>	NES.3341.367.05
<b>Tonalità/Light tone</b>	4000K
<b>Potenza/Power</b>	28,8W
<b>Fusso luminoso/Luminous flux</b>	2000 lm - 2500 lm
<b>Colore/Color</b>	Anodizzato naturale



### Accessori/Accessories



AAA.TRSL08.00  
Driver LED tensione costante 24V 30W

AAA.TRSL08.00  
Driver LED constant voltage 24V 30W.



AAA.TRSL09.00  
Driver LED tensione costante 24V 75W

AAA.TRSL09.00  
Driver LED constant voltage 24V 75W.



NES.SO0000.00  
NET-16 sospensioni (coppia)

NES.SO0000.00  
NET-16 suspension