




T-Uni Lens LED, 1970 mm, 55W, CRI90, 4000K. Nero. Driver incluso. Lenti 110°.

T-Uni Lens LED 1970mm, 55W, CRI90, 4000K, black, driver included. 110° lenses.



Descrizione/Description

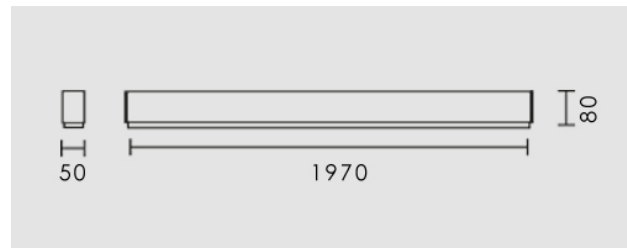

IT: T-Uni è una famiglia di sistemi lineari LED installabili singolarmente, fila continua, a plafone, sospensione e incasso in controsoffitto. Elegante nel design, si presta alle applicazioni più diverse integrandosi perfettamente in contesti residenziali, commerciali, business e education. Corpo in lega di alluminio, testate in acciaio, verniciatura a polveri. Ottiche a fascio stretto, largo, asimmetrico e retail con micro-lenti con il controllo dell'abbagliamento. Tono luce bianco 5500K, 4000K o 3000K, Potenze da 32W/1130mm a 71W/2530mm. Alimentatore elettronico incluso. Testate, Giunti lineari ed accessori per la sospensione da ordinare a parte.

ENG: T-Uni is a family of LED linear lighting systems for single or continuous lines, for ceiling, suspended or recessed use. Its Elegant design perfectly integrates T-UNI to various applications in residential, commercial and business environments. Structure in powder coated aluminium alloy, steel end caps. Narrow, wide, asymmetric and retail beam optics, with micro-lenses and glare control. LED in 5500K 4000K or 3000K white tone. Powers from 32W/1130mm up to 71W/2530mm. Electronic driver included. End caps, junctions, and kit for suspended installation to be ordered separately.

Codice/Code	TNL.3466.267.03
Tonalità/Light tone	4000K
Potenza/Power	55W
Fusso luminoso/Luminous flux	8001 lm - 8500 lm
Colore/Color	Nero Ral9005
Fascio luminoso/Light beam	Fascio simmetrico
Driver/Driver	Driver On/Off



Accessori/Accessories



TNI.DP0000.00
T-Uni attacco a plafone (coppia)

TNI.DP0000.00
T-Uni ceiling mount (pair).



TNI.SO0000.00
T-Uni Kit di sospensione (coppia) per modello monolampada

TNI.SO0000.00
T-Uni suspension kit (pair) for one lamp version.



TNI.TE0000.03
T-Uni testata per modello monoemissione, Nero

TNI.TE0000.03
T-Uni end-cap, Black.